











Mounting: wall surface	LED: CREE PCB high-power	LED driver options:	Areas of use:
Housing: aluminum/steel	CRI: >80	ND - non-dimmable	indoors: hotels, residential
Diffuser: PMMA lens	AC Volt: 220-240V	PH - phase dimmable	(sides of bed, above pictures)
Housing color options:	Frequency: 50/60Hz	010V - 0-10V dimmable	
16-polished chrome	Color temperature, K:	DALI - compatible	
Notes:	CT27-2700K/CT30-3000K	Note:	
* other colors are available on request	CT40-4000K/CT60-6000K	* Drivers are remote unless	
* rods' lengths are variable on request	Notes:	stated in specific cases	
	* Lm given in data is based on 3000K		
	* other CCT is available on request		



Ref Code	Watt	mA	Lm
12.04.001.01.01	1W	350	130
12.04.001.02.03	3W	700	200

Beam Angle-Code:
20°-BA20
40°-BA40



Ordering Guide:
12.04.001.01.01+103+16+CT30+BA20+ND
(item+type+housing color+LED CCT+beam+driver)

Mounting: wall surface
Housing: aluminum/steel
Diffuser: PMMA lens
Housing color options:
 16-polished chrome

Notes:

- * other colors are available on request
- * rods' lengths are variable on request

LED: CREE PCB high-power
CRI: >80
AC Volt: 220-240V
Frequency: 50/60Hz
Color temperature, K:
 CT27-2700K/CT30-3000K
 CT40-4000K/CT60-6000K

Notes:

- * Lm given in data is based on 3000K
- * other CCT is available on request

LED driver options:


ND - non-dimmable
 PH - phase dimmable
 010V - 0-10V dimmable
 DALI - compatible

Note:

- * Drivers are remote unless stated in specific cases

Areas of use:








indoors: hotels, residential
 (sides of bed, above pictures)



Ref Code	Watt	mA	Lm
12.04.002.01.01	1W	350	130
12.04.002.02.02	2W	350	180

Beam Angle-Code:


20°-BA20
 40°-BA40
 60°-BA60



Ordering Guide:









12.04.002.01.01+203+16+CT30+BA20+ND
 (item+type+housing color+LED CCT+beam+driver)

Mounting: wall surface Housing: aluminum/steel Diffuser: PMMA lens Housing color options: 16-polished chrome Notes: * other colors are available on request * rods' lengths are variable on request	LED: CREE PCB high-power CRI: >80 AC Volt: 220-240V Frequency: 50/60Hz Color temperature, K: CT27-2700K/CT30-3000K CT40-4000K/CT60-6000K Notes: * Lm given in data is based on 3000K * other CCT is available on request	LED driver options: ND - non-dimmable PH - phase dimmable 010V - 0-10V dimmable DALI - compatible Note: * Drivers are remote unless stated in specific cases	Areas of use: indoors: hotels, residential (sides of bed, above pictures)
F III CE IP44			



Ref Code	Watt	mA	Lm
12.04.003.01.01	1W	350	130

Beam Angle-Code:
45°-BA45



Ordering Guide:
12.04.003.01.01+303+16+CT30+BA20+ND
(item+type+housing color+LED CCT+beam+driver)

Mounting: wall surface
Housing: aluminum/steel
Diffuser: PMMA lens
Housing color options:
 16-polished chrome

Notes:

- * other colors are available on request
- * rods' lengths are variable on request

LED: CREE PCB high-power
CRI: >80
AC Volt: 220-240V
Frequency: 50/60Hz
Color temperature, K:
 CT27-2700K/CT30-3000K
 CT40-4000K/CT60-6000K

Notes:

- * Lm given in data is based on 3000K
- * other CCT is available on request

LED driver options:



ND - non-dimmable
 PH - phase dimmable
 010V - 0-10V dimmable
 DALI - compatible

Note:

- * Drivers are remote unless stated in specific cases

Areas of use:

indoors: hotels, residential
 (sides of bed, above pictures)

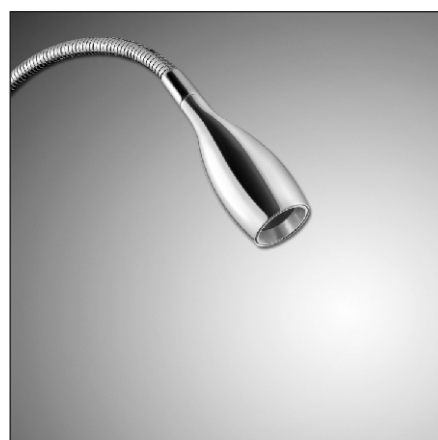

Ref Code

12.04.004.01.01
 12.04.004.02.03

Watt

1W
 3W

mA


350
 700

Lm


130
 200

Beam Angle-Code:


20°-BA20
 40°-BA40
 60°-BA60




401




Rod length: 323mm




404



Rod length: 80mm



402




Rod length: 350mm

with switch




405




Rod length: 70mm

with switch



403




Rod length: 388mm

integral LED driver



406



Rod length: 70mm

integral LED driver
 with switch

Ordering Guide:

12.04.004.01.01+403+16+CT30+BA20+ND
 (item+type+housing color+LED CCT+beam+driver)

