

Mounting:

- surface mounted (SFM)
- recessed (RCS)
- suspended (HNG) (up to 1m adjustable kit)

Housing: aluminum alloy (6063), ABS end caps

Diffuser: opal PMMA diffuser (DF.OPL)

Finish options:

- 15-silver grey matte (standard)

LED: aluminum PCB/SMD

CRI: >80-90

AC Volt: 220-240V

Frequency: 50/60Hz

Color temperature, K:

CT30-3000K

CT40-4000K

CT65-6500K

LED driver: integral

(Tridonic)

LED driver options:

ND - non-dimmable



PH - phase dimmable

010V - 0-10V dimmable

DALI - compatible

Application: indoors:

- public, private
- schools, universities
- class-rooms, offices, etc.

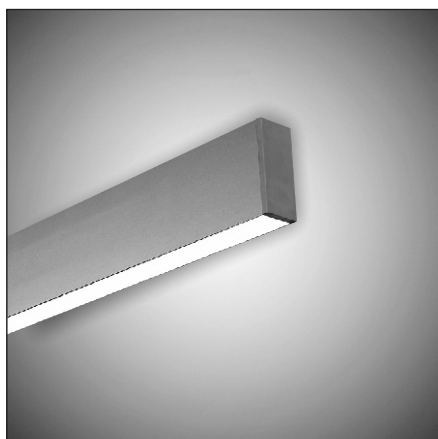

Ref Code


Ref Code	Wtt	Lm(±)	L,mm
07.22.105.01.20	20W	1500	1180
07.22.105.02.28	28W	2100	1180
07.22.105.03.35	35W	2650	1180
07.22.106.01.25	25W	1900	1470
07.22.106.02.35	35W	2650	1470
07.22.107.01.40	40W	3000	2340
07.22.107.02.56	56W	4200	2340
07.22.107.03.70	70W	5250	2340

Ordering Guide:


07.22.105.01.20+SFM+CNKT+CT30+ND

(item+mounting type+continuous connection+LED CCT+driver)


Note: * Lm data is based on final lumen output




Angles options for continuous connection:




CNKT-L
312x312x66/10W




CNKT-T
584x312x66/15W



CNKT-X
584x584x66/20W



CNKT-V
300x300x66/10W



CNKT-R
350x350x66/10W

