



standard



slim trim



super-slim housing





circular (with trim)



trimless



Mounting: - suspended (HNG) - surface (SFM) - recessed (RCS) Housing: aluminum Diffuser: PMMA, opal Trim Colors: 01-white matte/13-grey matte Note: * other colors are available on request	LED: SMD CRI: >80-90 Efficacy: 80/100/130 lm/W Bins: 3-5 bins (±)100-250K Note: * please, mention required Ra/efficacy/bins/CCT while ordering	Color temperature, K: CT22-2200K CT24-2400K CT27-2700K CT30-3000K CT35-3500K CT40-4000K CT45-4500K CT50-5000K CT60-6000K CT65-6500K	AC Volt: 220-240V Frequency: 50/60Hz LED driver options: ND - non-dimmable PH - phase dimmable 010V - 0-10V dimmable DALI - compatible	Ambient Temp: -20° ... +50° Application: indoors: residential, hotels, schools kitchens, offices, class-rooms, work-shops, etc.
RoHS III F CE IP52				

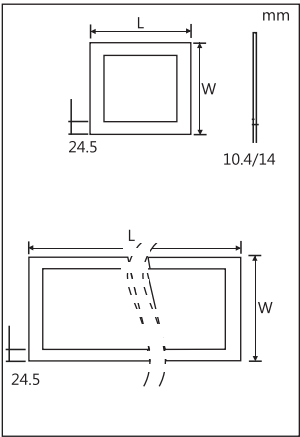

CV (constant voltage) 24VDC	Dimmable 0-10v PWM DALI	Ref Code	Watt	Lm(±)	LxWxH
		06.20.001.01.11	11W	650-1430	295x295x10.4
		06.20.001.02.22	22W	1300-2860	295x295x10.4
		06.20.002.01.22	22W	1300-2860	295x595x10.4
		06.20.003.01.42	42W	2600-5460	295x1195x10.4
		06.20.004.01.36	36W	2400-4680	595x595x10.4
		06.20.004.02.42	42W	2600-5460	595x595x10.4
		06.20.005.01.60	60W	3600-7800	595x1195x14
		06.20.005.02.85	85W	5200-11050	595x1195x14
		06.20.006.01.46	46W	2700-5980	615x615x10.4

Ordering Guide:
06.20.001.04.36+HNG+13+CRI90+100lmw+3bin+CT40+DALI
(item code+hanging type+trim color (grey matte)+CRI+Lm/W+bin+LED CCT (4000k)+driver)

CC (constant current)	Non-Dimmable	Ref Code	Watt	mA	VDC	Lm(±)	LxWxH
		06.20.007.01.11	11W	400	18-27V	650-1430	295x295x10.4
		06.20.008.01.22	22W	540	30-42V	1300-2860	295x595x10.4
		06.20.009.01.40	40W	1250	24-34V	2600-5200	295x1195x10.4
		06.20.010.01.36	36W	1050	24-34V	2400-4680	595x595x10.4
		06.20.010.02.40	40W	1250	24-34V	2600-5200	595x595x10.4
		06.20.011.01.60	60W	1500	27-42V	3600-7800	595x1195x14
		06.20.011.02.85	85W	2100	27-42V	5200-11050	595x1195x14

Ordering Guide:
06.20.010.02.40+RC+13+CRI90+100lmw+3bin+CT30+ND
(item+recessed type+trim color (grey matte)+CRI+Lm/W+bin +LED CCT (3000k)+driver)

WW Bi-White Tunable	BW control Wireless	CV (constant voltage) 24VDC	Ref Code	Watt	Lm(±)	LxWxH
			06.20.012.01.13	13W	0-1690	295x295x10.4
			06.20.013.01.22	22W	0- 2860	295x595x10.4
			06.20.014.01.42	42W	0-5460	295x1195x10.4
			06.20.015.01.45	45W	0-5850	595x595x10.4

Ordering Guide:
06.20.015.01.45+SFM+01+CRI90+100lmw+3bin
(item code+surface mounted type+trim color (white matte)+CRI+Lm/W+bin

RGB control DMX Wireless	CV (constant voltage) 24VDC	Ref Code	Watt	LxWxH
		06.20.016.01.13	13W	295x295x10.4
		06.20.017.01.26	26W	295x595x10.4
		06.20.018.01.55	55W	295x1195x10.4
		06.20.019.01.52	52W	595x595x10.4
		06.20.020.01.55	55W	595x1195x14

Ordering Guide:
06.20.019.01.52+HNG+01+CRI90+100lmw+3bin
(item code+hanging type+trim color (white matte)+CRI+Lm/W+bin

Mounting:

- suspended (HNG)
- surface (SFM)
- recessed (RCS)

Housing: aluminum

Diffuser: PMMA, opal

Trim Colors:

01-white matte/13-grey matte

Note: * other colors are available on request

LED: SMD

CRI: >80-90

Efficacy:

80/100/130 lm/W

Bins:

3-5 bins (±)100-250K

Note:

* please, mention required Ra/efficacy/bins/CCT while ordering

Color temperature, K:

CT22-2200K
CT24-2400K
CT27-2700K
CT30-3000K
CT35-3500K
CT40-4000K
CT45-4500K
CT50-5500K
CT60-6000K
CT65-6500K

AC Volt: 220-240V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

PH - phase dimmable


010V - 0-10V dimmable

DALI - compatible



Ambient Temp: -20° ... +50°

Application: indoors:

residential, hotels, schools
kitchens, offices, class-rooms,
work-shops, etc.



Beam Angle: 112°

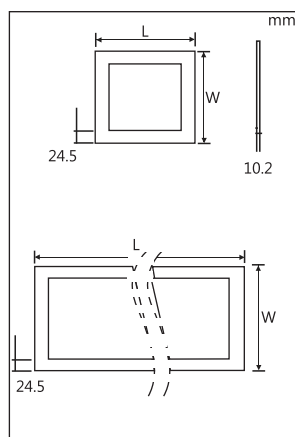

CV
(constant voltage)
24VDC

Dimmable
0-10v
PWM DALI

Ref Code	Watt	Lm(±)	LxWxH
06.20.021.01.11	11W	650-1430	295x295x10.2
06.20.022.01.22	22W	1300-2860	295x595x10.2
06.20.023.01.42	42W	2600-5460	295x1195x10.2
06.20.024.01.42	42W	2600-5460	595x595x10.2
06.20.025.01.46	46W	2700-5980	615x615x10.2

Ordering Guide:

06.20.024.01.42+HNG+13+CRI90+100lmw+3bin+CT40+DALI
(item code+hanging type+trim color (grey matte)+CRI+Lm/W+bin+LED CCT (4000k)+driver)

CC (constant current)	Non-Dimmable	Ref Code	Watt	mA	VDC	Lm(±)	LxWxH
		06.20.026.01.11	11W	400	18-27v	650-1430	295x295x10.2
		06.20.027.01.22	22W	540	30-42v	1300-2860	295x595x10.2
		06.20.028.01.40	40W	1250	24-34v	2600-5200	295x1195x10.2
		06.20.029.01.36	36W	1050	24-34v	2400-4680	595x595x10.2
		06.20.029.02.40	40W	1250	24-34v	2600-5200	595x595x10.2

Ordering Guide:

06.20.020.01.36+RC+13+CRI90+100lmw+3bin+CT30+ND
(item+recessed type+trim color (grey matte)+CRI+Lm/W+bin+LED CCT (3000k)+driver)

WW Bi-White Tunable	BW control Wireless	CV (constant voltage) 24VDC	Ref Code	Watt	Lm(±)	LxWxH
			06.20.030.01.13	13W	0-1690	295x295x10.4
			06.20.031.01.22	22W	0-2860	295x595x10.4
			06.20.032.01.42	42W	0-5460	295x1195x10.4
			06.20.033.01.45	45W	0-5850	595x595x10.4

Ordering Guide:

06.20.033.01.45+SFM+01+CRI90+100lmw+3bin
(item code+surface mounted type+trim color (white matte)+CRI+Lm/W+bin)

RGB control DMX Wireless	CV (constant voltage) 24VDC	Ref Code	Watt	LxWxH
		06.20.034.01.13	13W	295x295x10.2
		06.20.035.01.26	26W	295x595x10.2
		06.20.036.01.55	55W	295x1195x10.2
		06.20.037.01.52	52W	595x595x10.2
		06.20.038.01.55	55W	595x1195x10.2

Ordering Guide:

06.20.037.01.52+HNG+01+CRI90+100lmw+3bin
(item code+hanging type+trim color (white matte)+CRI+Lm/W+bin)

CV (constant voltage) 24VDC	Dimmable 0-10v PWM DALI	IP65	Ref Code	Watt	Lm(±)	LxWxH
			06.20.039.01.11	11W	650-1430	295x295x13.3
			06.20.040.01.22	22W	1300-2860	295x595x13.3
			06.20.041.01.42	42W	2600-5460	295x1195x13.3
			06.20.042.01.42	42W	2600-5460	595x595x13.3

Ordering Guide:

06.20.042.01.42+HNG+01+CRI90+100lmw+3bin
(item code+hanging type+trim color (white matte)+CRI+Lm/W+bin)

Mounting:

- suspended (HNG)
- surface (SFM)
- recessed (RCS)

Housing: aluminum

Diffuser: PMMA, opal

Trim Colors:

01-white matte/ 13-grey matte

Note: * other colors are available on request

LED: SMD

CRI: >80-90

Color temperature, K:

Ct22 (2200K)-CT65 (6500K)

Efficacy: 80/100/130 lm/W

Bins: 3-5 bins (±)100-250K

Note:

* please, mention required Ra/efficacy/bins/CCT while ordering

AC Volt: 220-240V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

PH - phase dimmable


010V - 0-10V dimmable

DALI - compatible

Ambient Temp: -20° ... +50°

Application: indoors:

residential, hotels, schools
kitchens, offices, class-rooms,
work-shops, etc.

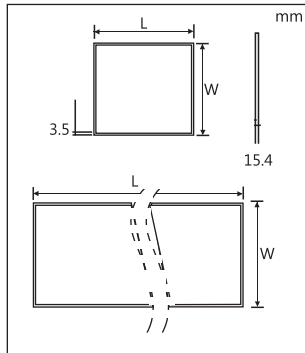

Ordering Guide:

06.20.46.01.45+HNG+13+CRI90+100lmw+3bin+CT40+DALI
(item+hanging type+trim color+CRI+Lm/W+bin+LED CCT+driver)

Ref Code

06.20.043.01.13

Watt

13W

Lm(±)

860-1300

LxWxH

295x295x15.4

06.20.044.01.24

24W

1650-3120

295x595x15.4

06.20.045.01.45

45W

3310-5850



295x1195x15.4

06.20.046.01.45

45W

3410-5850

595x595x15.4

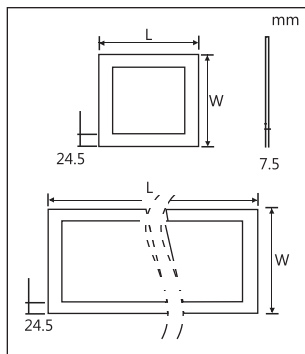

Ordering Guide:

06.20.047.01.11+HNG+13+CRI90+100lmw+3bin+CT40+DALI
(item+hanging type+trim color+CRI+Lm/W+bin+LED CCT+driver)

Ref Code

06.20.047.01.11

Watt

11W

Lm(±)

860-1430

LxWxH

295x295x7.5

06.20.048.01.24

24W

1650-3120



295x595x7.5

06.20.049.01.45

45W

3310-5850

595x595x7.5

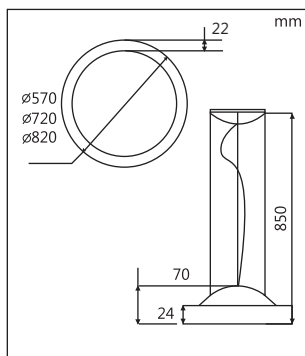

Ordering Guide:

06.20.050.01.33+HNG+13+CRI90+100lmw+3bin+CT40+DALI
(item+hanging type+trim color+CRI+Lm/W+bin+LED CCT+driver)

Ref Code

06.20.050.01.33

Watt

33W

Lm(±)

2100-4290

Dia

570

06.20.051.01.38

38W

2600-4940



720

06.20.052.01.85

85W

3500-11050

820

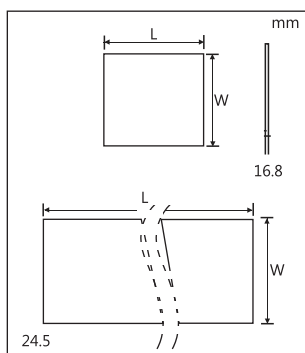

Ordering Guide:

06.20.053.01.13+HNG+13+CRI90+100lmw+3bin+CT40+DALI
(item+hanging type+trim color+CRI+Lm/W+bin+LED CCT+driver)

Ref Code

06.20.053.01.13

Watt

13W

Lm(±)

860-1300

LxWxH

295x295x16.8

06.20.054.01.24

24W

1650-3120


295x595x16.8

06.20.055.01.45


45W

3310-5850


595x595x16.8




mounting options:

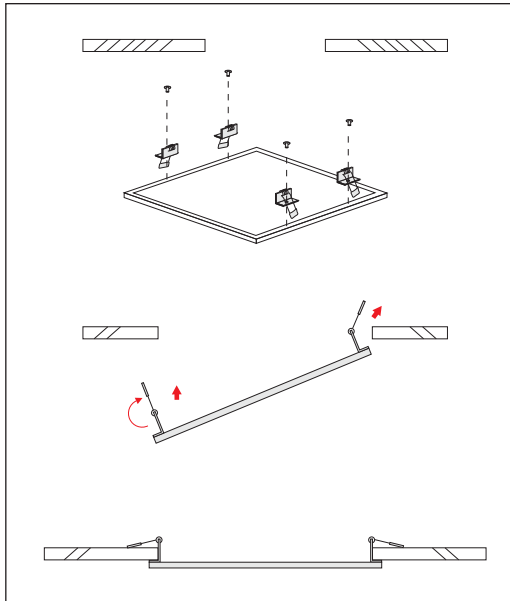


recess mounting clips



RCS-CLP

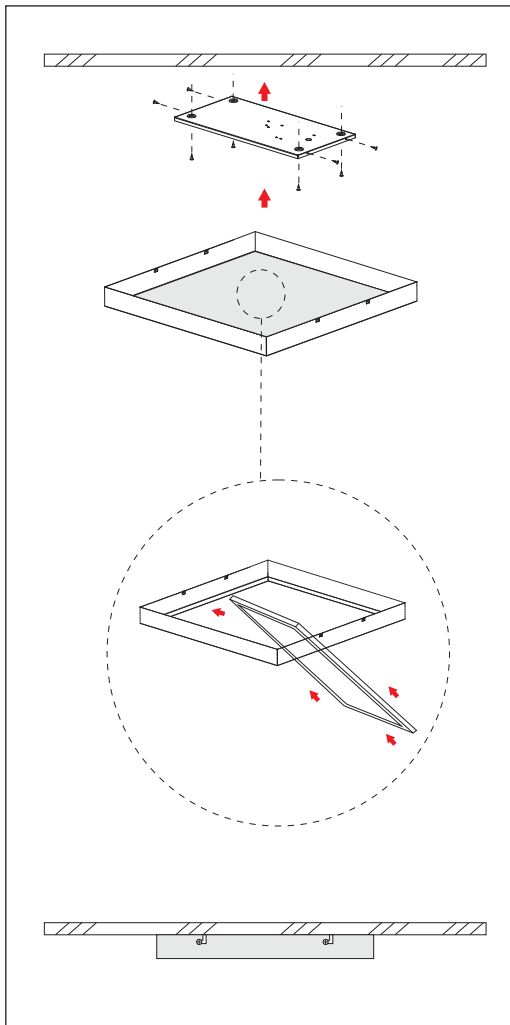


casing for surface mounting




SFM-CS-1

backplate for surface mounting



SFM-CS-2

backplate for surface mounting

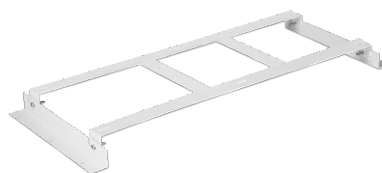

SF-CS-3

mounting options:

