


Mounting: recessed in wall	CRI: Ra>80	LED driver: integral	Application:
Housing: aluminum alloy	CCT:	Volt AC: 120-240V	outdoors:
Reflector: anodized pure aluminum	CT30-3000K/CT40-4000K	LED driver options:	in vertical position
Diffuser: clear safety glass	CT50-5000K/CT60-6000K	constant current	stairs, walls, steps
Gasket: silicone		constant voltage	Ambient Temp:
Color options:			-35°~+55°C
01-white matte	Note:		
11-black matte	*Other CRI/CCT are available on request		
15-grey matte	* Lumen output data is (±) and is based on 3000K		



Ref Code	Watt	Lm(±)	L	N.W.
27.42.044.01.06	6W	230	170	0.6 kg
27.42.045.01.12	12W	340	260	0.8 kg
27.42.046.01.15	15W	480	320	1.0 kg

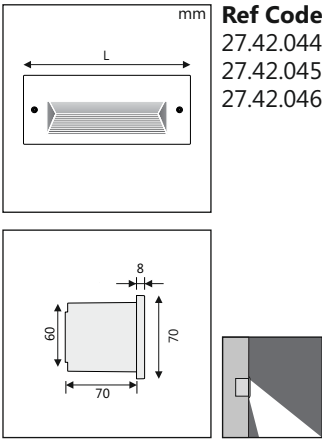