

mini flood lights



flood lights



flood lights (big sizes)






Mounting:
surface mounted on bracket/spike
Housing:
die-cast powder coated aluminum
Diffuser: 4 mm tempered glass
Gasket: tooling shaped seal
Fitting's finish options:
11-black matte
13-grey matte
15-silver grey matte
21-brown

LED:
COB/SMD (Osram/Cree)
CRI: Ra>80
Binning: 2 MacAdam
CCT:
CT30-3000K/CT40-4000K
CT50-5000K/CT60-6000K
RGB
Note:*Other CRI/CCT is available on request

LED driver:
integral/remote
Volt AC: 100-240V
Volt DC: 12V/24V
Frequency: 50/60Hz
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible

Application:
outdoors
public/private/residential
hotels/parks
landscapes
gardens
Ambient Temp: -35°~+55°C



Ref Code	Watt	Volt	mA	Lm(±)
32.27.001.01.02	2W	24V DC	110	160
32.27.001.02.02	2W	240V AC	28	
32.27.001.03.03	2W(RGB 3-in-1)	24V DC(RGB)	38/53/54	




Beam Angle-Code:

4°-BA04
9°-BA09
15°-BA15
20°-BA20
30°-BA30
45°-BA45

RGB
30°-BA30

Power Cable:

DC 24V 2x1.0mm²/L=2.0m
AC 240V 3x1.0mm²/L=2.0m
RGB 4x0.75mm²/L=2.0m






Ref Code	Watt	Volt	mA	Lm(±)
32.27.002.01.08	8W	24V DC	411	850
32.27.002.02.08	8W	240V AC	50	
32.27.002.03.10	10W	24V DC	480	
32.27.002.04.10	10W	240V AC	60	

Beam Angle-Code:

15°-BA15
24°-BA24
30°-BA30
38°-BA38
60°-BA60

Power Cable:




DC 24V 2x1.0mm² / L=2.0m
AC 240V 3x1.0mm² / L=2.0m
RGB 4x0.75mm² / L=2.0m

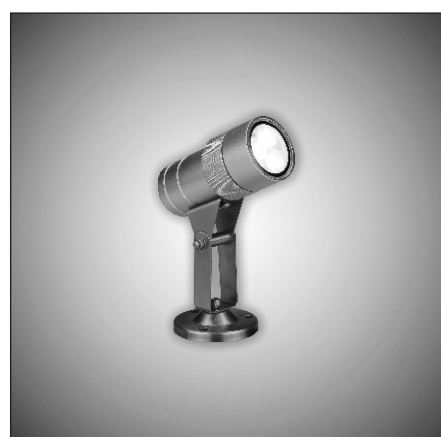

Ref Code	Watt	Lm(±)	DiaxH
32.45.040.01.1.1	1.1W	90	38x108
32.45.040.02.02	2W	100	38x108
32.45.041.01.04	4W	285	47x130

Beam Angle-Code:

1.1W, 2W 4W
5°-BA05 15°-BA15
25°-BA25 25°-BA25
40°-BA40 60°-BA60

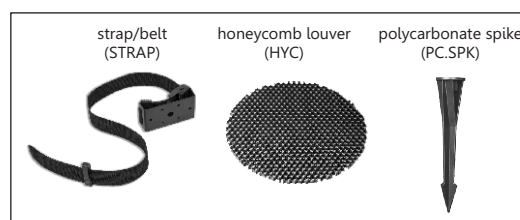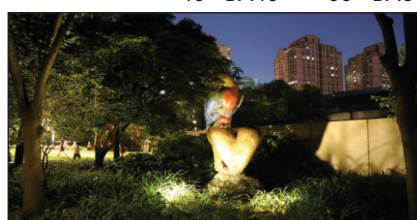

Mounting: surface mounted/spike
(ground/wall/pole)

Housing:

high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree/Lumileds

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
is available on request

LED driver:

- integral (CC)

- remote external

Volt AC: 240V

Volt DC: 12-24V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

Application:

outdoors


public/private/residential

landscapes

building facades

gardens

Ambient Temp: -35°~+55°C



Ref Code

32.26.046.01.12

Watt

12W

LED Qty

3Pcs

LED Color

WH

32.26.046.02.12

12W

3Pcs

RGBW

32.26.046.03.15

15W

3Pcs


WH

32.26.046.04.24



24W

3Pcs

RGBW



DF.GLS.HYC



Ordering Guide:

32.26.046.01.12(x2)+BCK1+DF.GLS.HYC+15(MG)+CT30+BA12+ND

Beam Angle-Code:

WH

RGBW

2.6°-BA2.6

15°-BA15

3.5°-BA3.5

20°-BA20

12°-BA12

30°-BA30

20°-BA20

15°x60°-BA15x60





30°-BA30

60°-BA60


10°x70°-BA10x70

5°x20°-BA05x20


Bracket Options:

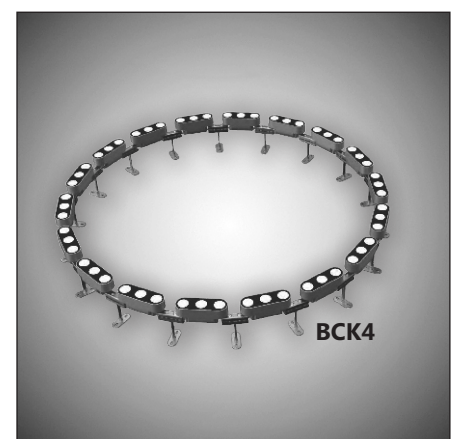


Examples of use of bracket BCK3:




Ref Code	Watt	LED Qty	LED Color
32.26.046.01.12(x2)	24W	6Pcs	WH
32.26.046.02.12(x2)	24W	6Pcs	RGBW
32.26.046.03.15(x2)	30W	6Pcs	WH
32.26.046.04.24(x2)	48W	6Pcs	RGBW

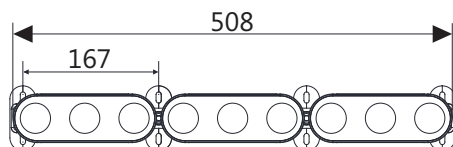


Ref Code	Watt	LED Qty	LED Color
32.26.046.01.12(x3)	36W	9Pcs	WH
32.26.046.02.12(x3)	36W	9Pcs	RGBW
32.26.046.03.15(x3)	45W	9Pcs	WH
32.26.046.04.24(x3)	72W	9Pcs	RGBW

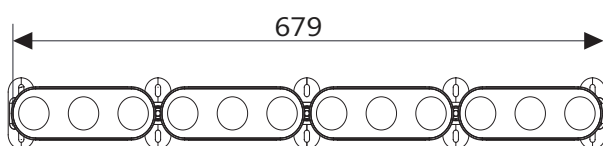


Ref Code	Watt	LED Qty	LED Color
32.26.046.01.12(x4)	48W	12Pcs	WH
32.26.046.02.12(x4)	48W	12Pcs	RGBW
32.26.046.03.15(x4)	60W	12Pcs	WH
32.26.046.04.24(x4)	96W	12Pcs	RGBW

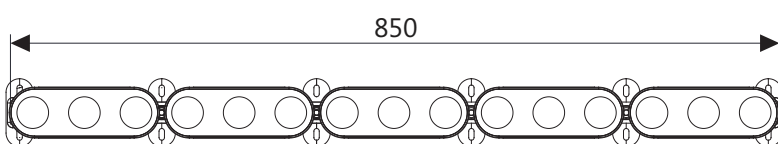


Ref Code	Watt	LED Qty	LED Color
32.26.046.01.12(x5)	60W	15Pcs	WH
32.26.046.02.12(x5)	60W	15Pcs	RGBW
32.26.046.03.15(x5)	75W	15Pcs	WH
32.26.046.04.24(x5)	120W	15Pcs	RGBW

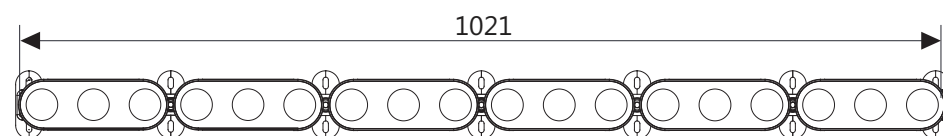


Ref Code	Watt	LED Qty	LED Color
32.26.046.01.12(x6)	72W	18Pcs	WH
32.26.046.02.12(x6)	72W	18Pcs	RGBW
32.26.046.03.15(x6)	90W	18Pcs	WH
32.26.046.04.24(x6)	144W	18Pcs	RGBW




Examples of use of bracket BCK4:




Ref Code	Watt	LED Qty	LED Color	LED
32.26.046.01.12(x2)	24W	6Pcs	WH	CREE XP-G3
32.26.046.02.12(x2)	24W	6Pcs	RGBW	OSRAM
32.26.046.03.15(x2)	30W	6Pcs	WH	CREE XP-L
32.26.046.04.24(x2)	48W	6Pcs	RGBW	CREE RGBW

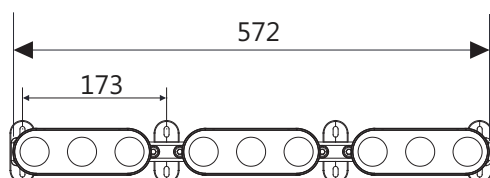


Ref Code	Watt	LED Qty	LED Color	LED
32.26.046.01.12(x3)	36W	6Pcs	WH	CREE XP-G3
32.26.046.02.12(x3)	36W	6Pcs	RGBW	OSRAM
32.26.046.03.15(x3)	45W	6Pcs	WH	CREE XP-L
32.26.046.04.24(x3)	72W	6Pcs	RGBW	CREE RGBW

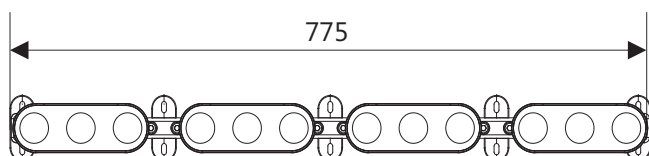



Ref Code	Watt	LED Qty	LED Color	LED
32.26.046.01.12(x4)	48W	12Pcs	WH	CREE XP-G3
32.26.046.02.12(x4)	48W	12Pcs	RGBW	OSRAM
32.26.046.03.15(x4)	60W	12Pcs	WH	CREE XP-L
32.26.046.04.24(x4)	96W	12Pcs	RGBW	CREE RGBW

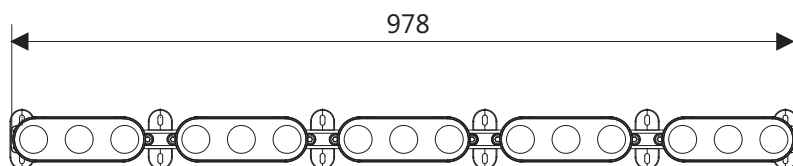

Ref Code	Watt	LED Qty	LED Color	LED
32.26.046.01.12(x5)	60W	15Pcs	WH	CREE XP-G3
32.26.046.02.12(x5)	60W	15Pcs	RGBW	OSRAM
32.26.046.03.15(x5)	75W	15Pcs	WH	CREE XP-L
32.26.046.04.24(x5)	120W	15Pcs	RGBW	CREE RGBW

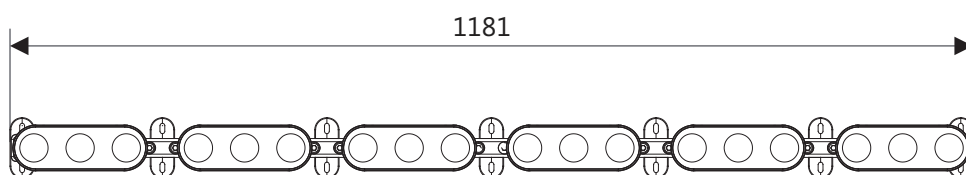

Ref Code	Watt	LED Qty	LED Color	LED
32.26.046.01.12(x6)	72W	18Pcs	WH	CREE XP-G3
32.26.046.02.12(x6)	72W	18Pcs	RGBW	OSRAM
32.26.046.03.15(x6)	90W	18Pcs	WH	CREE XP-L
32.26.046.04.24(x6)	144W	18Pcs	RGBW	CREE RGBW

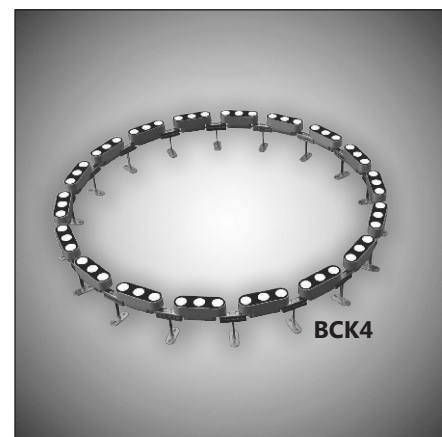

mini flood lights

ELTE

Mounting:

surface mounted on bracket/spike

Housing:

hard chrome-plated
stainless steel 1.4401 (SUS316)

Diffuser: 4 mm tempered glass

Bracket:

hard chrome-plated
stainless steel 1.4404 (SUS316L)

LED: Cree/Osram

CRI: Ra>80

CCT:

CT30-3000K

CT40-4000K

CT50-5000K

CT60-6000K

RGB/ Amber

Note:*Other CRI/CCT
is available on request

LED driver: remote

Volt AC: 240V

Volt DC: 12V/24V

Frequency: 50/60Hz

Power cable:

Single Color: 2x0.75mm²/L=3.0m

RGB: 4x0.75mm²/L=3.0m

Application:

outdoors
public/private/residential
hotels/parks
landscapes
gardens

Ambient Temp: -35°~+55°C


3 years
warranty

RoHS

CE

IK06
IK08

IP67



Ref Code 32.25.004.01.02
Watt 2W
Lm(±) 200

LED Color options:

CCT: 2700-6500K

fixed colors: red, green, blue, yellow, amber

Beam Angle



Code:

15°-BA15

30°-BA30

45°-BA45

60°-BA60



Ref Code 32.25.005.01.06
Watt 6W
Lm(±) 450

32.25.005.02.09 9W(RGB)

LED Color options:

CCT: 2700-6500K

fixed colors: red, green, blue, yellow, amber



RGB color changing

Beam Angle-Code:

24°-BA24


38°-BA38

60°-BA60



Ref Code 32.27.006.01.03
Watt 1x3W
Volt 24V DC
mA 110
Lm(±) 150

32.27.006.02.03 1x3W(RGB 3-in-1) 24V DC(RGB) 38/53/54



Beam Angle-Code:

symmetric (SYM)

20°-BA20


25°-BA25

30°-BA30

35°-BA35

RGB

25°-BA25





Mounting:

surface mounted on bracket/spike

Housing:

high pressure die-cast aluminum

Diffuser:

toughened glass

Finish options:

* RAL colors available on request

LED: SMD/COB (Cree)**CRI:** Ra>80**CCT:**

CT30-3000K

CT40-4000K

CT50-5000K

CT60-6000K

RGB

Note:*Other CRI/CCT is available on request**LED driver:** remote (CC)**Volt AC:** 240V**Volt DC:** 24V**Frequency:** 50/60Hz**LED driver options:**

ND - non-dimmable

PH - phase dimmable

010V - 0-10V dimmable

DALI - compatible

Application:

outdoors

public/private/residential

hotels/parks

landscapes



gardens

Ambient Temp: -35°~+55°C

N.W.: 0.5 kg



BCK1

**Ref Code**

32.26.007.01.1.5

32.26.007.02.03

Watt

1.5W (COB)

3W (COB)

LED Qty

1Pcs


1Pcs

Beam**Angle-Code:**

15°-BA15

28°-BA28

SPK





BCK2



N.W.: 0.5 kg



SPK

**Ref Code**

32.26.008.01.3.5

32.26.008.02.06

32.26.008.03.06

Watt

3.5W

6W

6W(COB)

LED Qty

3Pcs

3Pcs

1Pcs

Beam Angle-Code:

5°-BA05

12.5°-BA12.5

20°-BA20(COB)

30°-BA30

45°-BA45

60°-BA60

15°X30°-BA15X30

10°X60°-BA10X60



BCK



N.W.: 1.0 kg



BCK

**Ref Code**

32.26.009.01.07

32.26.009.02.11

32.26.009.03.12

Watt

7W

11W

12W(COB)

LED Qty

6Pcs

6Pcs

1Pcs

Beam Angle-Code:

5°-BA05

12.5°-BA12.5

20°-BA20(COB)

30°-BA30

45°-BA45

60°-BA60


15°X30°-BA15X30

10°X60°-BA10X60


SPK




RGB A

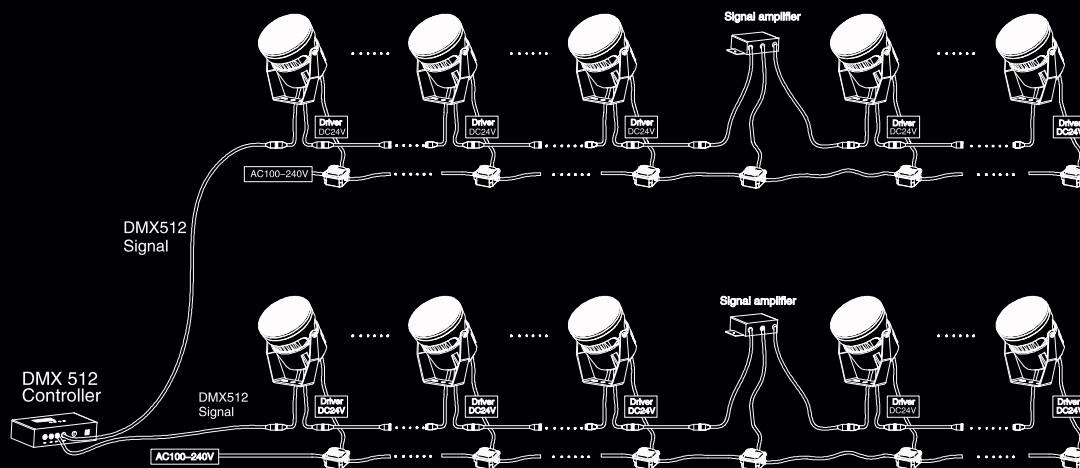

RGB B

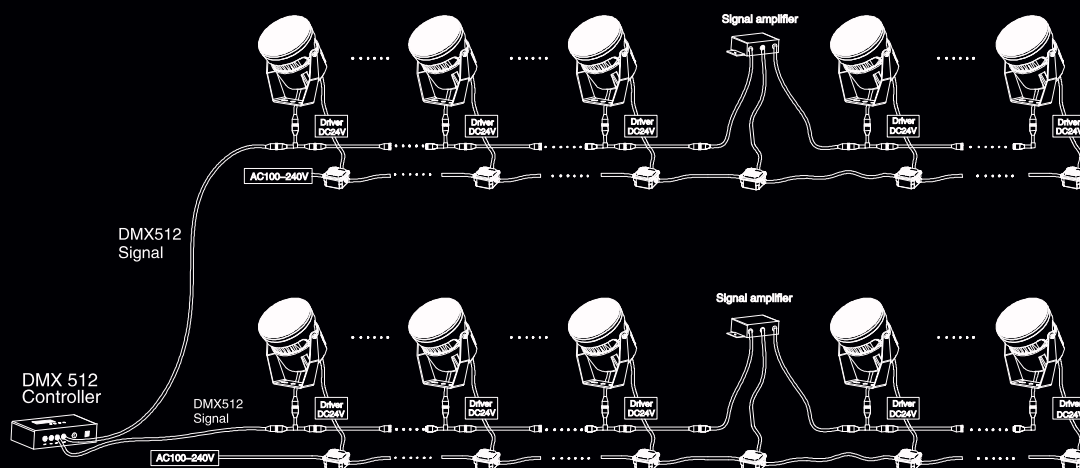

Single Color

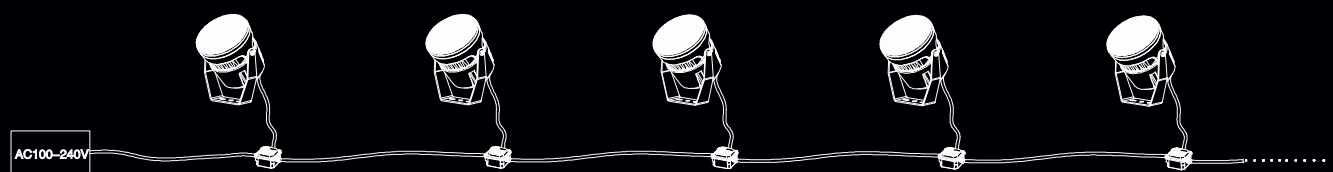



Mounting:

surface mounted on bracket

Housing:hard chrome-plated
stainless steel 1.4401 (SUS316)**Diffuser:** tempered glass**Bracket:**hard chrome-plated
stainless steel 1.4401 (SUS316)**LED:** Cree/Edison**CRI:** Ra > 80**CCT:**

CT30-3000K

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW/Amber

Note: *Other CRI/CCT
is available on request**LED driver:** external**Volt AC:** 240V**Volt DC:** 24V**Frequency:** 50/60Hz**LED driver options:**

ND - non-dimmable

PH - phase dimmable

010V - 0-10V dimmable

DALI - compatible

Application:

outdoor

public/private/residential

water landscapes

swimming pools/ponds

fountain/aquariums



Ambient Temp: -35° ~ +55°C

N.W.: 0.75 kg



BCK1

BCK2

**Ref Code**

32.31.015.01.03

32.31.015.02.03

32.31.015.03.09

Watt

3W (WH, CREE)

3W (WH, CREE)

9W (RGB, CREE)

Volt

CC, 350mA

CV, 12/24V DC

CC, 350mA

Lm(±)

300

**Note:**


*glass thickness is 5 mm

*fixed single colors available:
red, green, blue, amber**Beam Angle-Code:**


20°-BA20

60°-BA60

45°-BA45 (RGB only)





BCK1



BCK2

N.W.: 1.05 kg

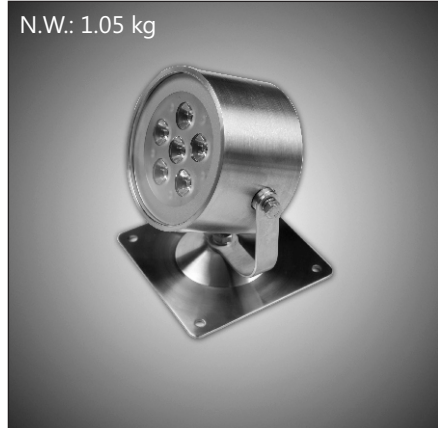**Ref Code**

32.31.016.01.06

32.31.016.02.06

32.31.016.03.06

Watt

6W (WH, CREE)

6W (WH, CREE)

6W (RGB, CREE)

Volt

CC, 350mA

CV, 24V DC

CC, 350mA

Lm(±)

500

**Beam Angle-Code:**

10°-BA10


40°-BA40

Note:

* glass thickness is 6 mm

* fixed single colors available: red, green, blue, amber

N.W.: 0.5 kg

**Ref Code**

32.31.017.01.01

32.31.017.02.01

32.31.017.03.03

Watt

1W (WH, CREE)

1W (WH, CREE)

3W (RGB, Edison)

Volt

CC, 350mA

CV, 24V DC

CC, 350mA

Lm(±)

108


**Note:**

*glass thickness is 4 mm

*fixed single colors available:
red, green, blue, amber**Beam Angle-Code:**

12°-BA12

45°-BA45



mini flood lights

ELTE

Mounting: surface mounted
on bracket/spike

Housing: die-cast aluminum

Diffuser: high intensity tempered glass

Reflector: polycarbonate

Gasket: silicone

stainless steel screws

Finish options:

11-black matte

LED: COB

CRI: Ra>80

CCT:

CT30-3000k

CT40-4000k

CT50-5000k

Note: *Lm given in data
is based on 4000k

LED driver: integral
constant current

Volt AC: 100-240V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

PH - phase dimmable

010V - 0-10V dimmable

DALI - compatible

Application:

outdoors




public/private/residential

hotels/parks


landscapes

gardens

Ambient Temp: -50°~+60°C

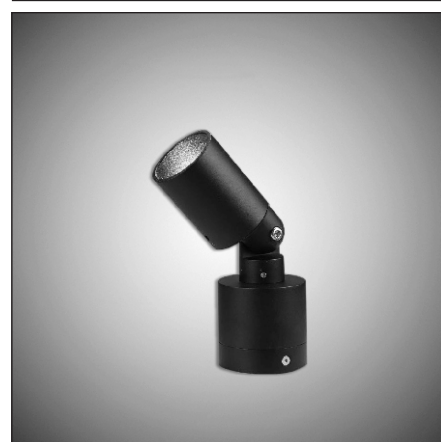

Ref Code	Watt	Lm(±)
32.45.031.01.11	11W	1408
32.45.031.02.15	15W	1886




Beam-Angle Code:

15°-BA15

25°-BA25


38°-BA38

60°-BA60




Optional accessories:



Anti-glare cap (CAP1)




Anti-glare cap (CAP2)



Rod Bracket (BCK1)

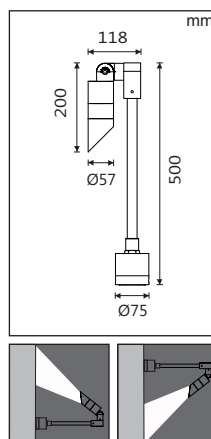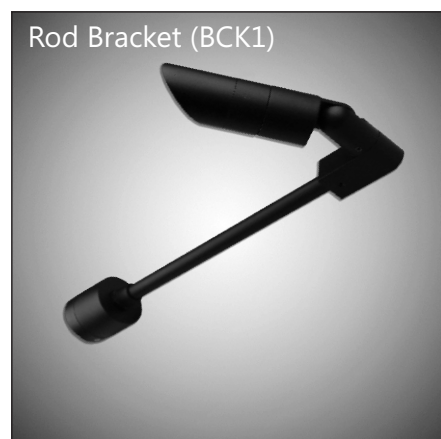


Rod Bracket (BCK2)

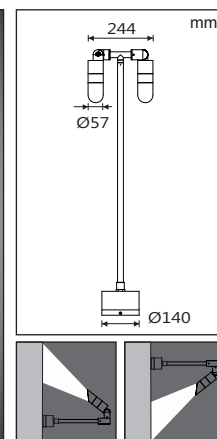

strap/belt
(STRAP)



honeycomb louver
(HYC)




polycarbonate spike
(PC.SPK)




spread lens

horizontal spread effect (DF.SPR1)



vertical spread effect (DF.SPR2)



Ordering Guide:

32.45.031.01.11+11+CT40+DF.SPR1+STRAP+CAP1

(item code+trim color (black matte)+CCT (4000k)+horizontal spread lense+fixing strap+anti-glare cap type)

Mounting:

surface mounted on bracket/spike

Housing:

die-cast powder coated aluminum

Diffuser: 4mm tempered glass

Gasket:

molding shaped silicon double seal

Fitting's finish options:

11-black matte/ 13-grey matte

15-silver grey matte

LED: SMD/COB

CRI: Ra>80

CCT:

CT30-3000K

CT40-4000K

CT50-5000K

CT60-6000K

RGB

Note:*Other CRI/CCT

is available on request

LED driver:

integral/remote

Volt AC: 240V

Volt DC: 24V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

PH - phase dimmable

010V - 0-10V dimmable

DALI - compatible

Application:

outdoors




public/private/residential

hotels/parks

landscapes

gardens

Ambient Temp: -30°~+55°C

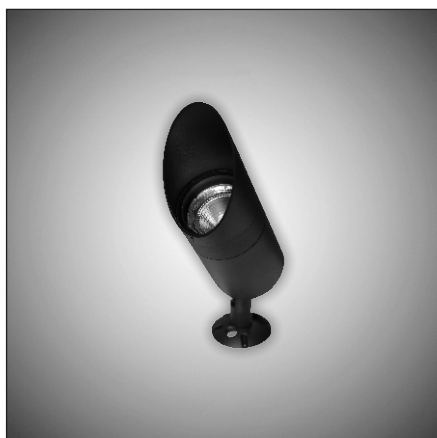
Ref Code

32.45.042.01.04

32.45.042.02.08

32.45.043.01.10

32.45.043.02.15

32.45.044.01.20

32.45.044.02.30

32.45.044.03.40

Watt

4W

8W

10W

15W

20W

30W

40W

Lm(±)

400

800

880

1320

2000

2910

3720

DiaxL

57x135

57x135

86x183

86x183

120x220

120x220

120x220

DiaxL (Cap1,2)

57x200

57x200


86x270

86x270

120x338

120x338

120x338


Beam Angle-Code:

4W, 8W

15°-BA15

25°-BA25

38°-BA38

10W, 15W,

24°-BA24

40°-BA40





60°-BA60

20W, 30W, 40W

24°-BA24

40°-BA40

60°-BA60

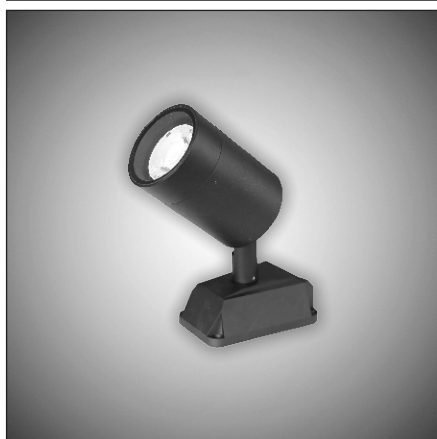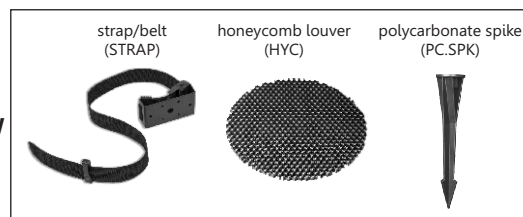
Ref Code


32.45.045.01.25

Watt

25W

Volt

230V AC


Beam Angle-Code:



10°-BA10

23°-BA23

36°-BA36



N.W.: 1.0 kg


Ref Code

32.26.010.01.3.5

32.26.010.05.3.5

32.26.010.02.06

32.26.010.06.06

32.26.010.03.08

32.26.010.07.08

32.26.010.04.10

Watt

3.5W

3.5W

6W

6W

8W

8W

10W(COB)

LED Qty

3Pcs

3Pcs

3Pcs

3Pcs

3Pcs

3Pcs

1Pcs

LED Color

WH

RGB

WH

RGB

WH

RGB

WH

Beam Angle

Code:

5°-BA05

12.5°-BA12.5

20°-BA20(COB)


30°-BA30

45°-BA45

60°-BA60

15°X30°-BA15X30

10°X60°-BA10X60



SPK



BCK1

Mounting: surface mounted/spike (ground/wall/pole)

Housing: high pressure die-cast aluminum with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree
CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT is available on request

LED driver:

- integral (CC)

- remote external

Volt AC: 100-240V

Volt DC: 12-24V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

DMX - DMX512

Application:

outdoors

public/private/residential



landscapes

building facades

gardens

Ambient Temp: -35°~+55°C

Ambient Humidity: 10%~90%



Ref Code

33.26.096.01.08

33.26.096.02.10

33.26.096.03.12

Watt

8W

10W

12W

Volt

12-24V DC

240V AC

240V AC

LED Qty

1Pcs

1Pcs

1Pcs (COB)

LED Color

RGBW

WH

WH

Beam Angle-Code:

8W

08°-BA08

25°-BA25

10°x45°-BA10x45

10W

03°-BA03

08°-BA08

25°-BA25



10°x45°-BA10x45

12W


12°-BA12

24°-BA24

38°-BA38



DF.GLS.HYC




5° beam angle optical lens

GRL



30° beam with anti-glare grill

DF.GLS.SPR



10x60° spread beam lens

Mounting: surface mounted/spike
(ground/wall/pole)

Housing:

high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree/Osram

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
is available on request

LED driver:

- integral (CC)

- remote external

Volt AC: 100-240V

Volt DC: 12-24V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

Application:

outdoors

public/private/residential


landscapes

building facades

gardens

Ambient Temp: -35°~+55°C

Ambient Humidity: 10%~90%



Beam Angle-Code:

Single color

2.6°-BA2.6

3.5°-BA3.5

12°-BA12

20°-BA20

30°-BA30

10°x70°-BA10x70

5°x20°-BA05x20

Ref Code

33.26.097.01.12

33.26.097.02.12

33.26.097.03.15

33.26.097.04.15

33.26.097.05.15

33.26.097.06.20

33.26.097.07.30

33.26.097.08.30

Watt

12W

12W

15W

15W

15W

20W

30W

30W

Volt

240V AC

12-24V DC

240V AC

240V AC

12-24V DC

240V AC

240V AC

12-24V DC

LED Qty

3Pcs

3Pcs

1Pcs (COB)

3Pcs

1Pcs

1Pcs (COB)

3Pcs

1Pcs

LED Color

WH

RGBW

WH

WH


RGBW

WH

WH

RGBW

DF.GLS.HYC




5° beam angle optical lens

GRL




30° beam with anti-glare grill



DF.GLS.SPR





10x60° spread beam lens




BCK2




BCK3



BCK4

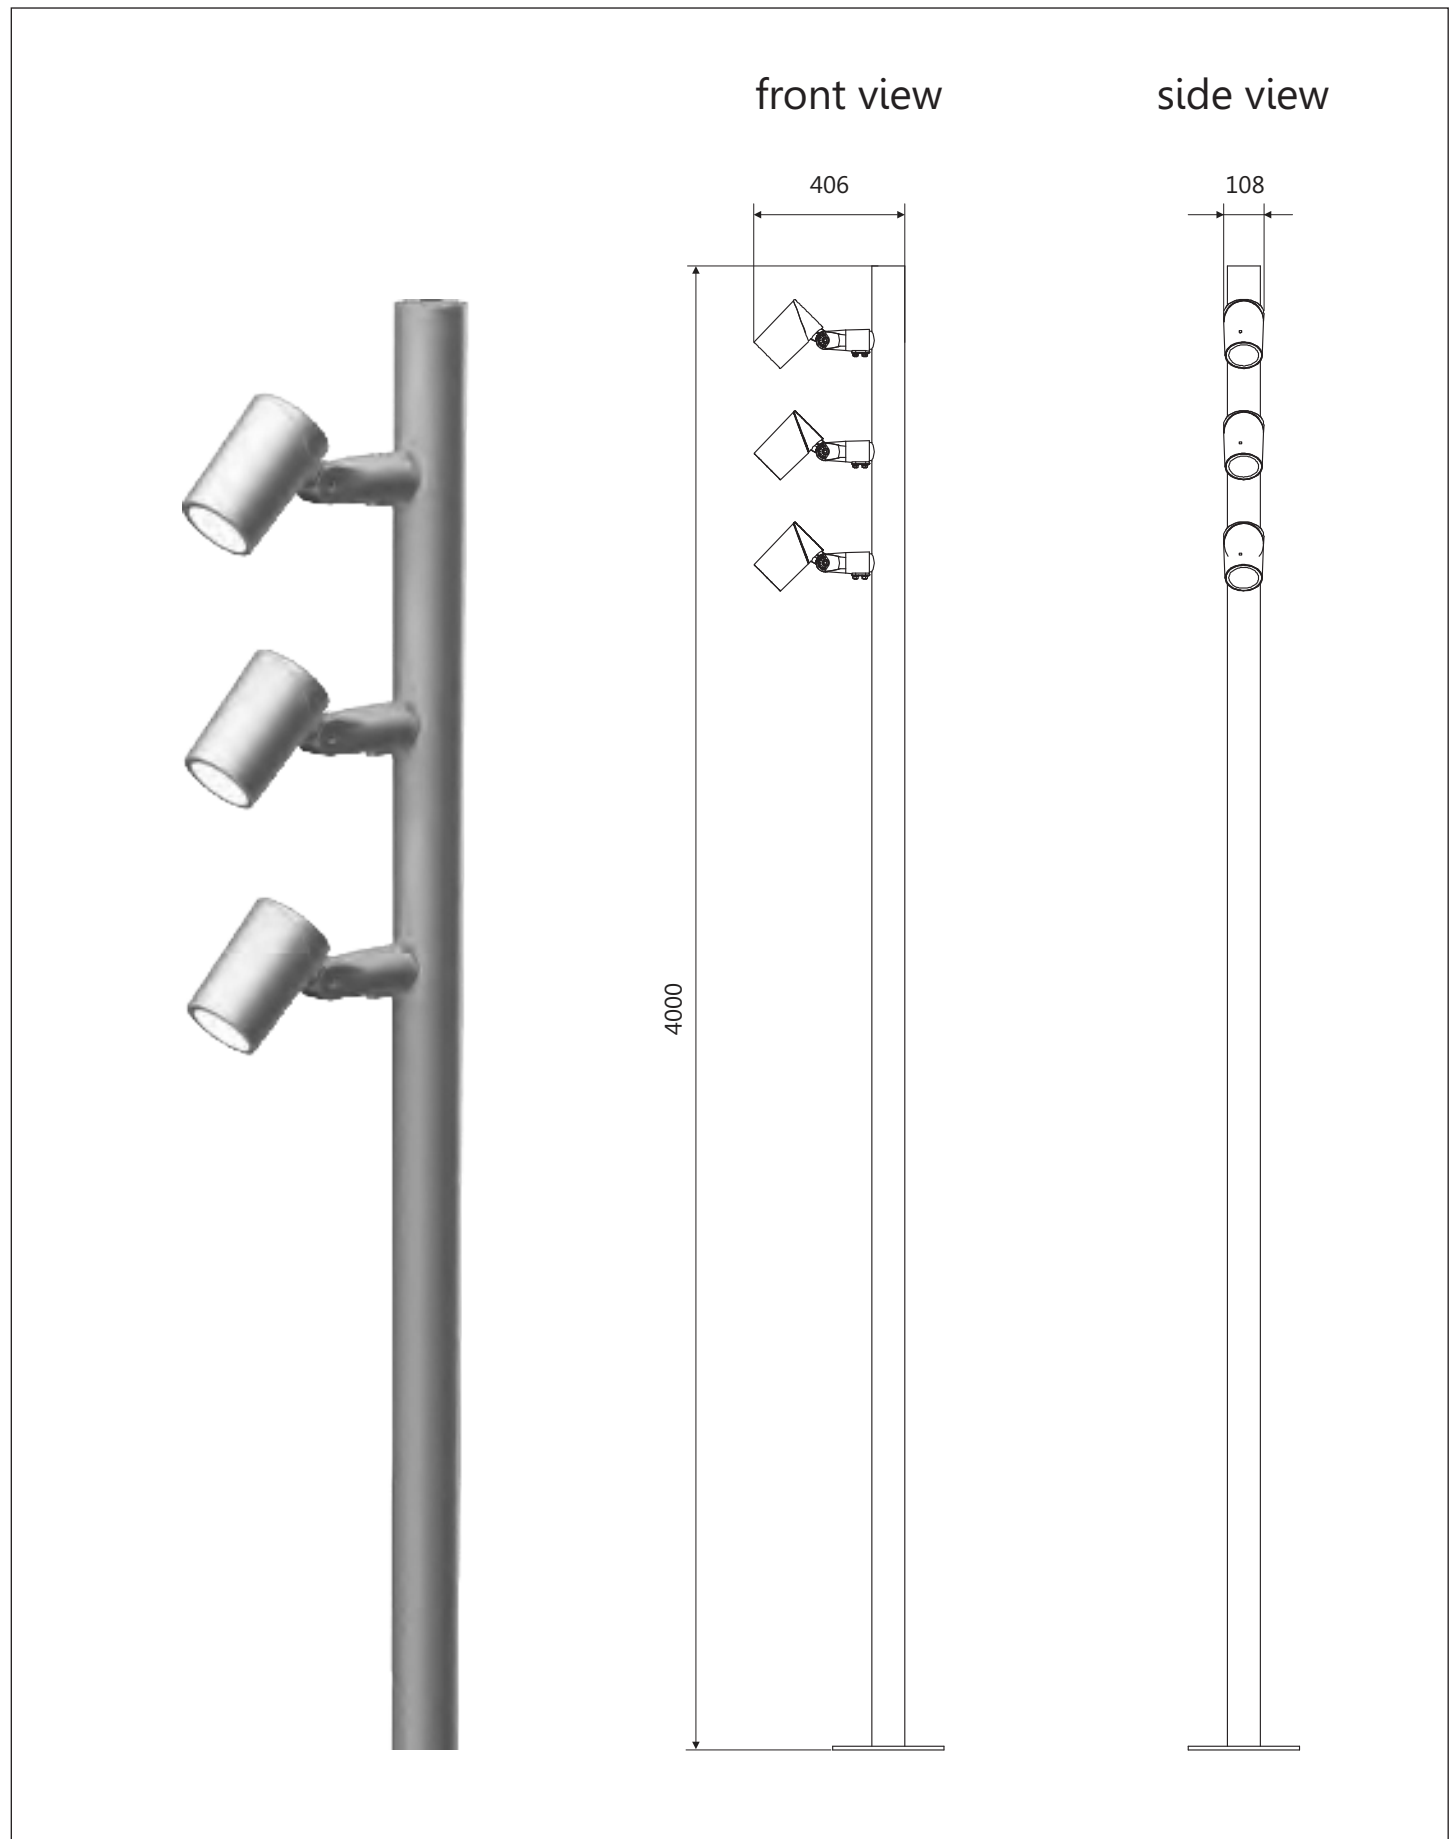

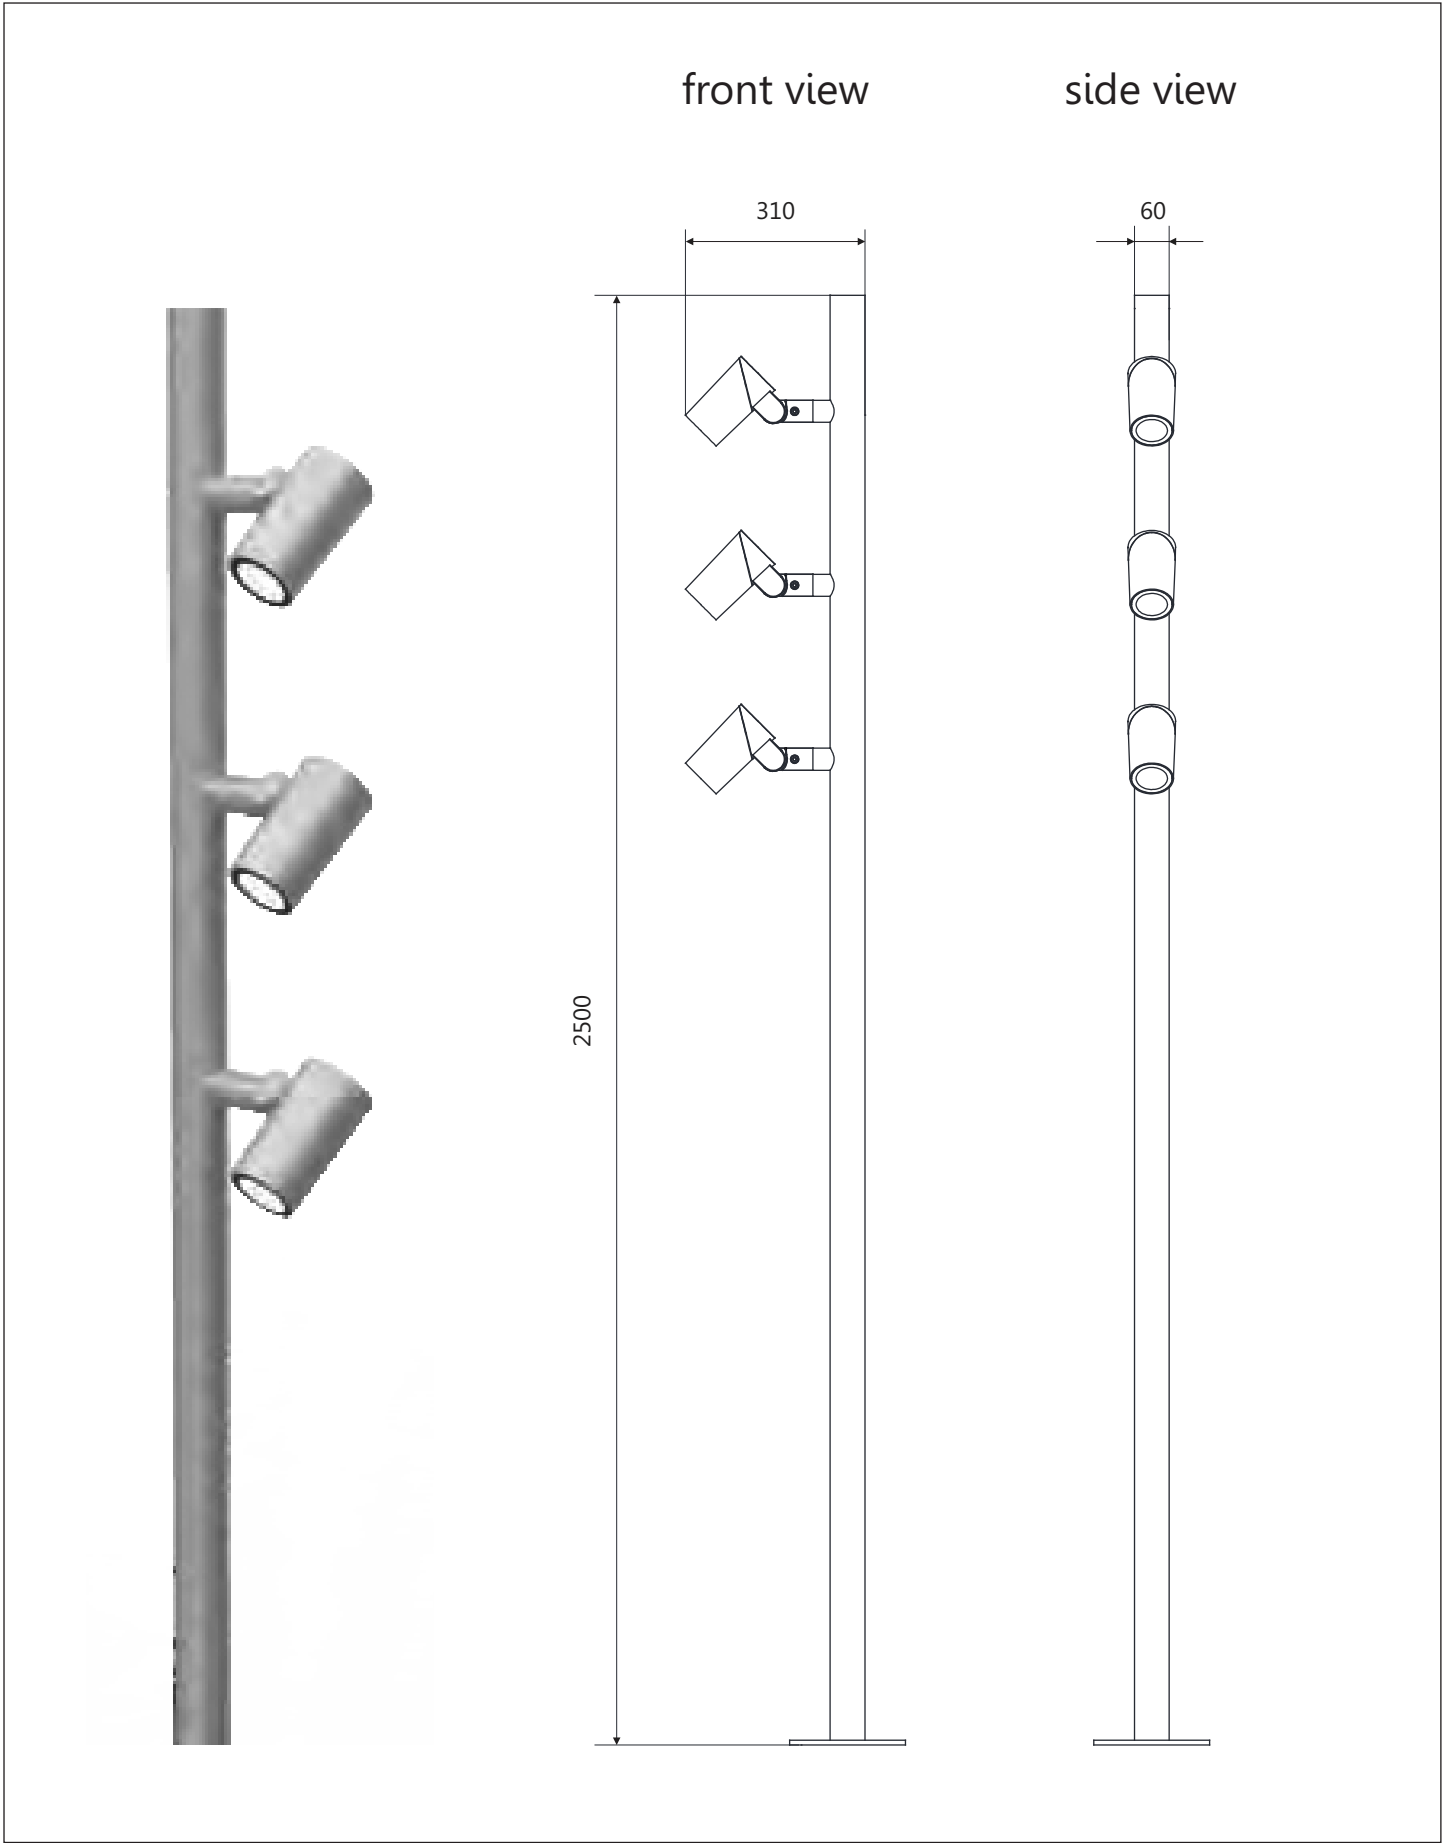

Mounting: surface mounted/spike (ground/wall/pole)

Housing: high pressure die-cast aluminum with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT is available on request

LED driver:

- integral (CC)

- remote external

Volt AC: 100-240V

Volt DC: 12-24V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

Application:

outdoors

public/private/residential



landscapes

building facades

gardens

Ambient Temp: -35°~+55°C

Ambient Humidity: 10%~90%



Ref Code	Watt	Volt	LED Qty	LED Color
33.26.098.01.45	45W	240V AC	5Pcs	WH
33.26.098.02.50	50W	240V AC	15Pcs	WH
33.26.098.03.50	50W	240V AC	1Pcs (COB)	WH
33.26.098.04.50	50W	24V DC	5Pcs	RGBW

Beam Angle-Code:

Single color

5°-BA05

8°-BA08

12°-BA12

12.5°-BA12.5

20°-BA20

30°-BA30

10°x70°-BA10x70

5°x20°-BA05x20

15°x30°-BA10x60

COB

12°-BA12

24°-BA24

38°-BA38

RGBW

20°-BA20

30°-BA30

15°x60°-BA15x60









5° beam angle optical lens



30° beam with anti-glare grill



10x60° spread beam lens

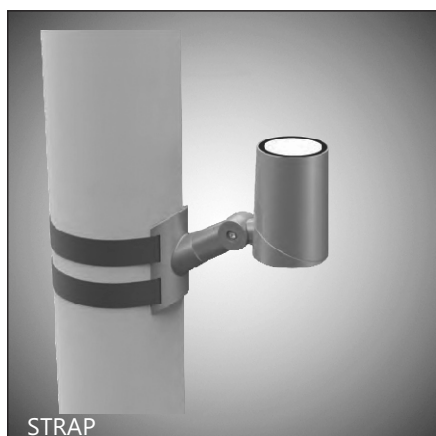

Mounting:

surface mounted on bracket/spike

Housing:

die-cast powder coated aluminum

Diffuser: 4 mm tempered glass

Gasket:

molding shaped silicon double seal

Fitting's finish options:

11-black matte/ 13-grey matte

15-silver grey matte

LED: SMD/COB

CRI: Ra>80

CCT:

CT30-3000K

CT40-4000K

CT50-5000K

CT60-6000K

RGB

Note:*Other CRI/CCT is available on request

LED driver:

integral/remote

Volt AC: 240V

Volt DC: 24V

Frequency: 50/60Hz

Power Cable:

DC 24V 2x1.0mm²/L=2.0m

AC 220V 3x1.0mm²/L=2.0m

Cable gland: IP-68 PG-9 copper and nickel coated

Application:

outdoors



public/private/residential

hotels/parks

landscapes

gardens

Ambient Temp: -30°~+55°C



Ref Code

32.27.020.01.09

32.27.020.02.09

32.27.020.03.12

Watt

6X1.5W

6X1.5W

6X2W(RGB 3-in-1)

Volt

24V DC

240V AC

24V DC(RGB)

mA

550

53

-

Lm(±)

1000



Beam Angle-Code:

symmetric (SYM) RGB





15°-BA15

20°-BA20

30°-BA30

45°-BA45

30°-BA30

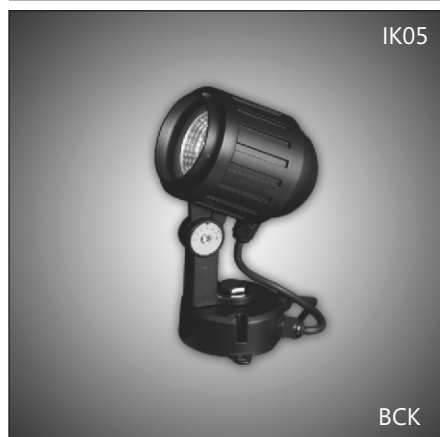

Ref Code

32.27.021.01.10

32.27.021.02.10

Watt

1x10W

1x10W

Volt

24V DC

240V AC

mA

411

48

Lm(±)



700



Beam Angle: 25°



Anti-glare cap (CAP)





Mounting: window sill
Optical lense, glare-free, flat design
Housing:
die-cast aluminum
Diffuser: clear tough polycarbonate
Finish options:
01-white matte
11-black matte
13-grey matte

LED: Cree
CRI: Ra> 80 (±3000K)
CCT:
CT30-3000K
CT40-4000K
CT60-6000K
RGBA
Nominal efficacy: 100 lm/W


LED driver: integral
Volt AC: 220-240V
Frequency: 50-60Hz
LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible

Application:
outdoors
public/private/residential
windows
building facades

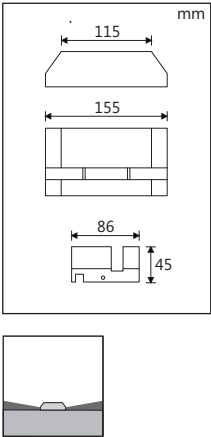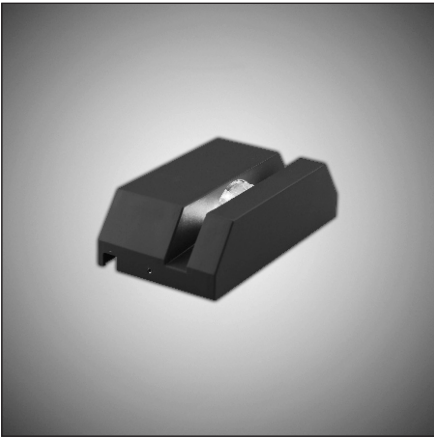

Ref Code	Watt	Lm
32.45.038.01.03	3W	214
32.45.038.02.06	6W	228

Beam angle: 12°x180°

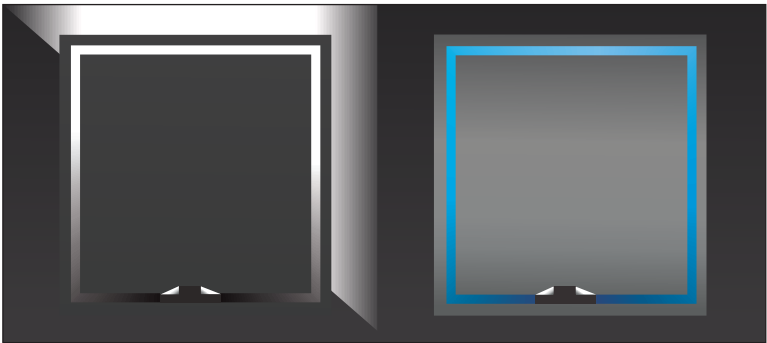

Mounting: surface mounted/spike
(ground/wall/pole)

Housing:

high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree/Osram

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
is available on request

LED driver:

- remote external

Volt DC: 12-24V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

Application:

outdoors



public/private/residential

landscapes



building facades, gardens

Ambient Temp: -35°~+55°C

Ambient Humidity: 10%~90%

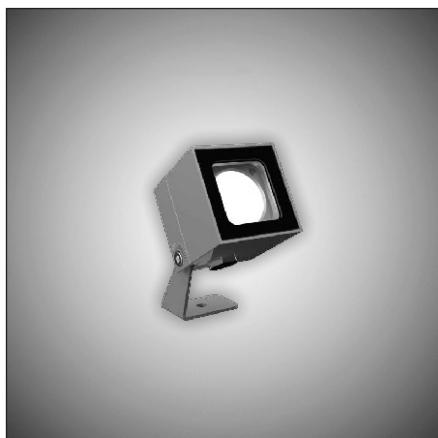

Ref Code	Watt	Volt	LED	LED Qty	LED Color	Beam Angle Options:
33.26.104.01.10	10W	DC 12V	CREE XHP35	1Pcs	WH	2.6°-BA2.6, 3.5°-BA3.5, 5°-BA05, 15°-BA15,
33.26.104.02.10	10W	DC 24V	CREE XHP35	1Pcs	WH	20°-BA20, 10x60°-BA10x60
33.26.104.03.08	8W	DC 12V	CREE RGBW	1Pcs	RGBW	15°-BA15, 20°-BA20, 30°-BA30, 15x60°-BA15x60
33.26.104.04.08	8W	DC 24V	CREE RGBW	1Pcs	RGBW	

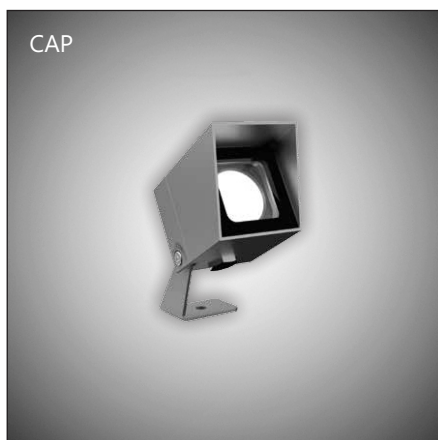

Mounting: surface mounted/spike
(ground/wall/pole)

Housing:
high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree/Osram

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
is available on request

LED driver:

- integral (CC)

- remote external

Volt AC: 240V

Volt DC: 12-24V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

Application:

outdoors


public/private/residential

landscapes



building facades, gardens

Ambient Temp: -35°~+55°C

Ambient Humidity: 10%~90%



Ref Code	Watt	Volt	LED	LED Qty	LED Color	Beam Angle Options:
33.26.105.01.12	12W	AC 100-264V	CREE COB	1Pcs	WH	12°-BA12, 24°-BA24, 36°-BA36, 70°-BA70
33.26.105.02.10	10W	AC 100-305V	CREE	4Pcs	WH	7-36° Zoom, operated by touch-screen
33.26.105.03.10	10W	DC 24V	CREE	4Pcs	WH	
33.26.105.04.10	10W	AC 100-240V	Osram	4Pcs	WH	6°-BA06, 15°-BA15, 20°-BA20, 30°-BA30, 45°-BA45, 20x40°-BA20x40, 15x25°-BA15x25
33.26.105.05.10	10W	DC 12V	Osram	4Pcs	WH	
33.26.105.06.10	10W	AC 100-264V	CREE/OSRAM	1Pcs	WH	2.6°-BA2.6, 3.5°-BA3.5, 12°-BA12, 20°-BA20, 30°-BA30, 60°-BA60, 10x70°-BA10x70, 5x20°-BA05x20
33.26.105.07.60	60W	DC 24V	CREE RGBW	1Pcs	RGBW	8°-BA08, 15°-BA15, 20°-BA20, 30°-BA30, 15x60°-BA15x60

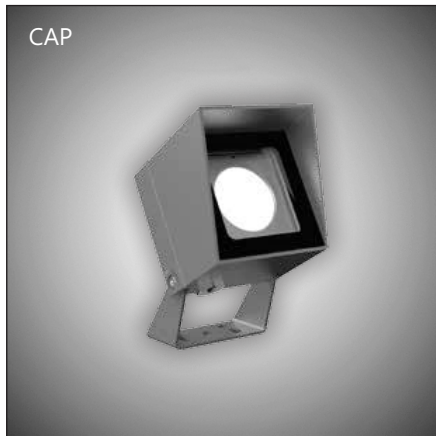

Mounting: surface mounted/spike
(ground/wall/pole)

Housing:

high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree/Osram

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
is available on request

LED driver:

- integral (CC)

- remote external

Volt AC: 240V

Volt DC: 24-36V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

Application:

outdoors


public/private/residential

landscapes



building facades, gardens








Ambient Temp: -35°~+55°C

Ambient Humidity: 10%~90%



Ref Code	Watt	Volt	LED	LED Qty	LED Color	Beam Angle Options:
33.26.106.01.20	20W	AC 100-305V	CREE COB	1Pcs	WH	12°-BA12, 24°-BA24, 36°-BA36, 70°-BA70
33.26.106.02.18	18W	AC 100-305V	CREE	16Pcs	WH	7-36° Zoom, operated by touch-screen
33.26.106.03.18	18W	DC 24V	CREE	16Pcs	WH	
33.26.106.04.20	20W	AC 100-305V	Osram	8Pcs	WH	6°-BA06, 15°-BA15, 20°-BA20, 30°-BA30, 45°-BA45, 20x40°-BA20x40, 15x25°-BA15x25
33.26.106.05.20	20W	DC 24V	Osram	8Pcs	RGBW	
33.26.106.06.20	20W	AC 100-305V	CREE/OSRAM	4Pcs	WH	2.6°-BA2.6, 3.5°-BA3.5, 12°-BA12, 20°-BA20, 30°-BA30, 60°-BA60, 10x70°-BA10x70, 5x20°-BA05x20
33.26.106.07.60	60W	DC 24V	CREE RGBW	4Pcs	RGBW	
						8°-BA08, 15°-BA15, 20°-BA20, 30°-BA30, 15x60°-BA15x60



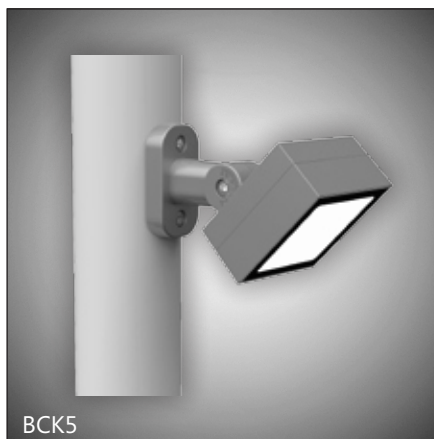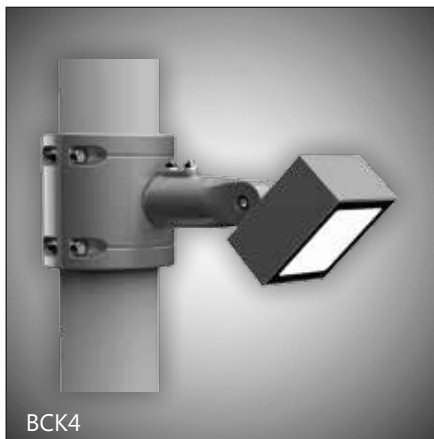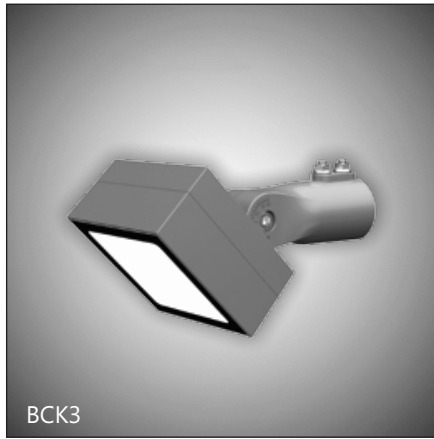

Mounting: surface mounted/spike
(ground/wall/pole)

Housing:
high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree/Osram

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
is available on request

LED driver:

- integral (CC)

- remote external

Volt AC: 240V

Volt DC: 24-36V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

Application:

outdoors


public/private/residential

landscapes




building facades, gardens






Ambient Temp: -35°~+55°C

Ambient Humidity: 10%~90%



Ref Code	Watt	Volt	LED	LED Qty	LED Color	Beam Angle Options:
33.26.107.01.45	45W	AC 100-305V	CREE COB	1Pcs	WH	12°-BA12, 24°-BA24, 36°-BA36, 70°-BA70
33.26.107.02.40	40W	AC 100-305V	CREE	36Pcs	WH	7-36° Zoom, operated by touch-screen
33.26.107.03.40	40W	DC 24V	CREE	36Pcs	WH	
33.26.107.04.36	36W	AC 100-305V	Lumileds/Osram	18Pcs	RGBW	6°-BA06, 15°-BA15, 20°-BA20, 30°-BA30, 45°-BA45, 20x40°-BA20x40, 15x25°-BA15x25
33.26.107.05.36	36W	DC 24V	Lumileds/Osram	18Pcs	RGBW	
33.26.107.06.45	45W	AC 100-305V	CREE/OSRAM	9Pcs	WH	2.6°-BA2.6, 3.5°-BA3.5, 12°-BA12, 20°-BA20, 30°-BA30, 60°-BA60, 10x70°-BA10x70, 5x20°-BA05x20
33.26.107.07.60	60W	AC 100-305V	CREE/OSRAM	9Pcs	WH	
33.26.107.08.45	45W	AC 100-305V	Osram	18Pcs	WH	6°-BA06, 15°-BA15, 20°-BA20, 30°-BA30, 45°-BA45, 20x40°-BA20x40, 15x25°-BA15x25
33.26.107.09.60	60W	AC 100-305V	Osram	18Pcs	WH	
33.26.107.10.45	45W	DC 36V	Osram	18Pcs	WH	
33.26.107.11.60	60W	DC 36V	Osram	18Pcs	WH	
33.26.107.12.60	60W	AC 100-305V	CREE RGBW	9Pcs	RGBW	8°-BA08, 15°-BA15, 20°-BA20, 30°-BA30, 15x60°-BA15x60
33.26.107.13.60	60W	DC 36V	CREE RGBW	9Pcs	RGBW	

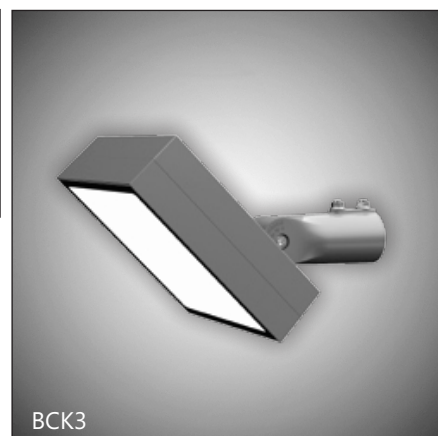

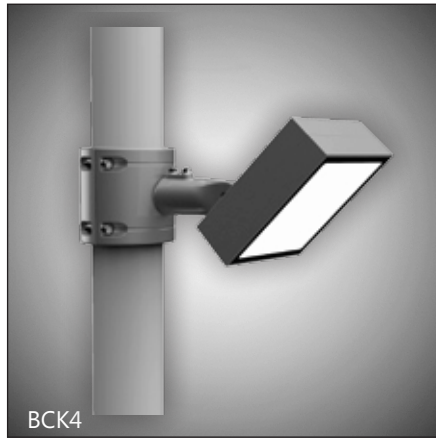

Mounting: surface mounted/spike
(ground/wall/pole)

Housing:

high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree/Osram

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
is available on request

LED driver:

- integral (CC)

- remote external

Volt AC: 240V

Volt DC: 24-36V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

Application:

outdoors



public/private/residential

landscapes



building facades, gardens






Ambient Temp: -35°~+55°C

Ambient Humidity: 10%~90%



Ref Code	Watt	Volt	LED	LED Qty	LED Color	Beam Angle Options:
33.26.108.01.75	75W	AC 100-305V	CREE COB	4Pcs	WH	12°-BA12, 24°-BA24, 36°-BA36, 70°-BA70
33.26.108.02.75	75W	AC 100-305V	CREE	64Pcs	WH	7-36° Zoom, operated by touch-screen
33.26.108.03.75	75W	DC 24V	CREE	64Pcs	WH	
33.26.108.04.75	75W	AC 100-305V	Osram	32Pcs	RGBW	6°-BA06, 15°-BA15, 20°-BA20, 30°-BA30, 45°-BA45, 20x40°-BA20x40, 15x25°-BA15x25
33.26.108.05.75	75W	DC 36V	Osram	32Pcs	RGBW	
33.26.108.06.100	100W	AC 100-305V	CREE/OSRAM	16Pcs	WH	2.6°-BA2.6, 3.5°-BA3.5, 12°-BA12, 20°-BA20, 30°-BA30, 60°-BA60, 10x70°-BA10x70, 5x20°-BA05x20
33.26.108.07.75	75W	AC 100-305V	CREE/OSRAM	16Pcs	WH	
33.26.108.08.100	100W	AC 100-305V	Osram	32Pcs	WH	6°-BA06, 15°-BA15, 20°-BA20, 30°-BA30, 45°-BA45, 20x40°-BA20x40, 15x25°-BA15x25
33.26.108.09.75	75W	AC 100-305V	Osram	32Pcs	WH	
33.26.108.10.100	100W	DC 36V	Osram	32Pcs	WH	
33.26.108.11.75	75W	DC 36V	Osram	32Pcs	WH	
33.26.108.12.100	100W	AC 100-305V	CREE RGBW	16Pcs	RGBW	8°-BA08, 15°-BA15, 20°-BA20, 30°-BA30, 15x60°-BA15x60
33.26.108.13.100	100W	DC 36V	CREE RGBW	16Pcs	RGBW	



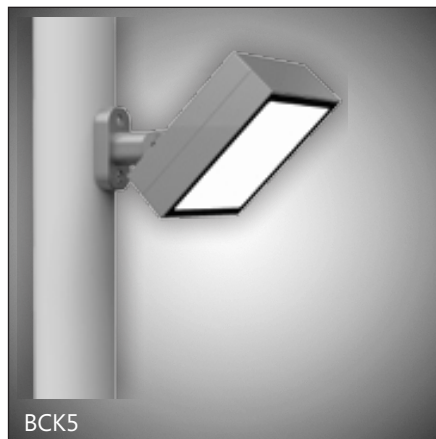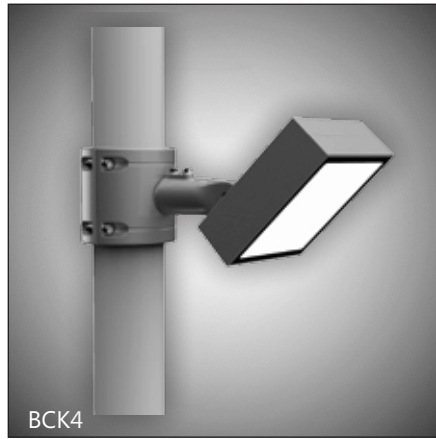

Mounting: surface mounted/spike
(ground/wall/pole)

Housing:

high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree/Osram

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
is available on request

LED driver:

- integral (CC)

- remote external

Volt AC: 240V

Volt DC: 24-36V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

Application:

outdoors



public/private/residential

landscapes



building facades, gardens

Ambient Temp: -35°~+55°C

Ambient Humidity: 10%~90%



Ref Code	Watt	Volt	LED	LED Qty	LED Color	Beam Angle Options:
33.26.109.01.120	120W	AC 100-305V	CREE COB	4Pcs	WH	12°-BA12, 24°-BA24, 36°-BA36, 70°-BA70
33.26.109.02.120	120W	AC 100-305V	CREE	100Pcs	WH	7-36° Zoom, operated by touch-screen
33.26.109.03.120	120W	DC 24V	CREE	100Pcs	WH	
33.26.109.04.120	120W	AC 100-305V	Osram	48Pcs	RGBW	6°-BA06, 20°-BA20, 30°-BA30, 45°-BA45, 20x40°-BA20x40, 15x25°-BA15x25
33.26.109.05.120	120W	DC 36V	Osram	48Pcs	RGBW	
33.26.109.06.150	150W	AC 100-305V	CREE/OSRAM	25Pcs	WH	2.6°-BA2.6, 3.5°-BA3.5, 12°-BA12, 20°-BA20, 30°-BA30, 60°-BA60, 10x70°-BA10x70, 5x20°-BA05x20
33.26.109.07.120	120W	AC 100-305V	CREE/OSRAM	25Pcs	WH	
33.26.109.08.150	150W	AC 100-305V	Osram	48Pcs	WH	6°-BA06, 15°-BA15, 20°-BA20, 30°-BA30, 45°-BA45, 20x40°-BA20x40, 15x25°-BA15x25
33.26.109.09.150	150W	DC 36V	Osram	48Pcs	WH	
33.26.109.10.120	120W	AC 100-305V	Osram	48Pcs	WH	
33.26.109.11.120	120W	DC 36V	Osram	48Pcs	WH	
33.26.109.12.150	150W	AC 100-305V	CREE RGBW	24Pcs	RGBW	8°-BA08, 15°-BA15, 30°-BA30, 15x60°-BA15x60
33.26.109.13.150	150W	DC 36V	CREE RGBW	24Pcs	RGBW	
33.26.109.14.200	200W	AC 100-305V	CREE RGBW	24Pcs	RGBW	
33.26.109.15.200	200W	DC 36V	CREE RGBW	24Pcs	RGBW	





Mounting:

surface mounted on bracket/spike

Housing:

die-cast powder coated aluminum

Diffuser: tough tempered glass

Gasket: tooling shaped seal

Bracket: steel/aluminum

Fitting's finish options:

11-black matte

13-grey matte

15-silver grey matte

LED: SMD/COB (Osram)

CRI: Ra>80

CCT:

CT30-3000K

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT available on request

LED driver: integral/remote

Volt AC: 240V

Volt DC: 24V

Frequency: 50/60Hz

Power Cable:

H05RN-F 2X1.0mm² L=2.0m(low voltage)

H05RN-F 3X1.0mm² L=2.0m(high voltage)

H05RN-F 4X0.75mm² L=2.0m(for RGB)

Application:

outdoors



public/private/residential

landscapes



building facades

gardens

Ambient Temp: -40°~+55°C



Ref Code	Watt	Volt/mA	mA	Lm(±)	DiaxHxW
33.27.001.01.06	1x6W(COB)	24V DC	270	500	105x130x98
33.27.001.02.06	1x6W(COB)	240V AC	35	500	105x130x98
33.27.002.01.15	3x5W	240V AC	82	1250	177x197x146





Beam Angle-Code:

18°-BA18

25°-BA25

40°-BA40



Ref Code	Watt	Volt	mA	DiaxHxW
33.27.003.01.06	3x2W	24V DC	240	105x149x62
33.27.003.02.06	3x2W	240V AC	30	
33.27.003.03.06	3x2W(RGB 3-in-1)	24V DC(R/G/B)	70/125/124	
33.27.004.01.12	6x2W	24V DC	530	151x208x75
33.27.004.02.12	6x2W	240V AC	56	
33.27.004.03.12	6x2W(RGB 3-in-1)	24V DC(R/G/B)	200/250/250	
33.27.005.01.18	6x3W	24V DC	850	177x241x89
33.27.005.02.18	6x3W	240V AC	84	
33.27.005.03.18	6x3W(RGB 3-in-1)	24V DC(R/G/B)	350/350/350	



Beam Angle-Code:

symmetric

15°-BA15

20°-BA20

30°-BA30

45°-BA45



RGB
30°-BA30

Lm(±)



400 (6W)

700 (12W)

1600 (18W)





Ref Code	Watt	Volt	mA	DiaxHxW
33.27.006.01.06	1x6W(RGBW 4-in-1)	24V DC	338	105x130x98
33.27.007.01.12	3x4W(RGBW 4-in-1)	24V DC	583	151x193x145
33.27.008.01.20	5x4W(RGBW 4-in-1)	24V DC	958	177x197x146



Beam Angle-Code:

15°-BA15

22°-BA22



Ref Code	Watt	Volt	mA	Lm(±)
33.27.009.01.36	18x2W	24V DC	1500	2000
33.27.009.02.36	18x2W	240V AC	155	
33.27.009.03.36	18x2W(RGB 3 in 1)	24V DC(R/G/B)	643/768/759	




Beam Angle-Code:

6°-BA06

20°-BA20

30°-BA30

RGB
30°-BA30



flood lights



ELTE

Mounting: surface mounted
on bracket/spike
Housing: high pressure die-cast
aluminum
Diffuser: toughened glass
Fitting's finish options:
11-black matte/ 13-grey matte
15-silver grey matte
*RAL colors available on request


LED: SMD/COB (Cree)
CRI: Ra>80
CCT:
CT30-3000K
CT40-4000K
CT50-5000K
CT60-6000K
RGB/RGBW
Note: * Other CRI/CCT
is available on request

LED driver: integral
Volt AC: 240V
Volt DC: 24V
Frequency: 50/60Hz
LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible

Application:
outdoors
public/private/residential
landscapes
building facades
gardens
Ambient Temp: -35°~+55°C







Ref Code	Watt	LED Qty	LED Color
33.26.010.01.11	11W	9Pcs	WH
33.26.010.03.11	11W	9Pcs	RGB
33.26.010.02.20	20W	9Pcs	WH
33.26.010.04.20	20W	9Pcs	RGB




Beam Angle-Code:

5°-BA05
12.5°-BA12.5
20°-BA20
30°-BA30
45°-BA45

Note:
RGB-DC 12/24V-DMX512
Single Color - AC 100/240V






Ref Code	Watt	LED Qty	LED Color
33.26.011.01.21	21W	18Pcs	WH
33.26.011.03.21	21W	18Pcs	RGB
33.26.011.02.30	30W	18Pcs	WH
33.26.011.04.30	30W	18Pcs	RGB



Beam Angle-Code:

5°-BA05
12.5°-BA12.5
20°-BA20
30°-BA30
45°-BA45

Note:
RGB-DC 12/24V-DMX512
Single Color - AC 100/240V



Mounting:

surface mounted on bracket/spike

Housing:

high pressure die-cast aluminum

Diffuser: toughened glass

Fitting's finish options:

11-black matte/ 13-grey matte

15-silver grey matte

* RAL colors available on request

LED: SMD/COB (Cree)

CRI: Ra>80

CCT:

CT30-3000K

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT is available on request

LED driver:

integral/ remote

Volt AC: 240V

Volt DC: 24V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

PH - phase dimmable

010V - 0-10V dimmable

DALI - compatible

Application:

outdoors

public/private/residential

landscapes

building facades

gardens



Ambient Temp: -35°~+55°C



N.W.: 7.5 kg



BCK1



Ref Code

33.26.012.01.50

33.26.012.04.50

33.26.012.02.60

33.26.012.05.60

33.26.012.03.86

33.26.012.06.86

Watt

50W

50W

60W

60W

86W

86W

LED Qty

24Pcs

24Pcs

36Pcs

36Pcs

36Pcs

36Pcs

LED Color

WH

RGB

WH

RGB

WH

RGB



Beam

Angle-Code:

5°-BA05

12.5°-BA12.5

20°-BA20


30°-BA30

45°-BA45


Note:

RGB-DC 24/36V-DMX512

Single Color - AC 100/240V



BCK2




Mounting:
surface mounted on bracket/spike
Housing:
high pressure die-cast aluminum
Diffuser: clear tempered glass
Finish options:
13-grey matte (standard)
* RAL colors available on request



LED: Cree
CRI: Ra>80
CCT:
CT30-3000K
CT40-4000K
CT50-5000K
CT60-6000K
RGB
Note: * Other CRI/CCT
is available on request

LED driver:
integral/ remote
Volt AC: 100V-240V
Volt DC: 24V
Frequency: 50/60Hz
LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible

Application:
outdoors
public/private/residential
landscapes
building facades
gardens
Ambient Temp: -35°~+55°C





Ref Code	Watt	LED Color	LED Qty	Lm(±)	N.W.,kg
33.26.014.01.21	21W	WH	6Pcs	2100	1.95
33.26.014.02.16	16W(COB)	WH	1Pcs	1600	1.95
33.26.014.03.12	12W	RGB	8Pcs	1.60	





Beam Angle-Code:
6°-BA06
12°-BA12
15°-BA15(COB)
30°-BA30
48°-BA48
12°x48°-BA12x48




Notes:
*RGB-DC 12V-DMX512
Single Color - AC 100/240V




Ref Code	Watt	LED Color	LED Qty	Lm(±)
33.26.015.01.28	28W	WH	15Pcs	2800
33.26.015.02.32	32W(COB)	WH	1Pcs	3200
33.26.015.03.32	32W	RGB	15Pcs	



Beam Angle-Code:
6°-BA06
12°-BA12
15°-BA15(COB)
20°-BA20
30°-BA30
48°-BA48
12°x48°-BA12x48



Notes:
*RGB-DC 12V-DMX512
Single Color - AC 100/240V

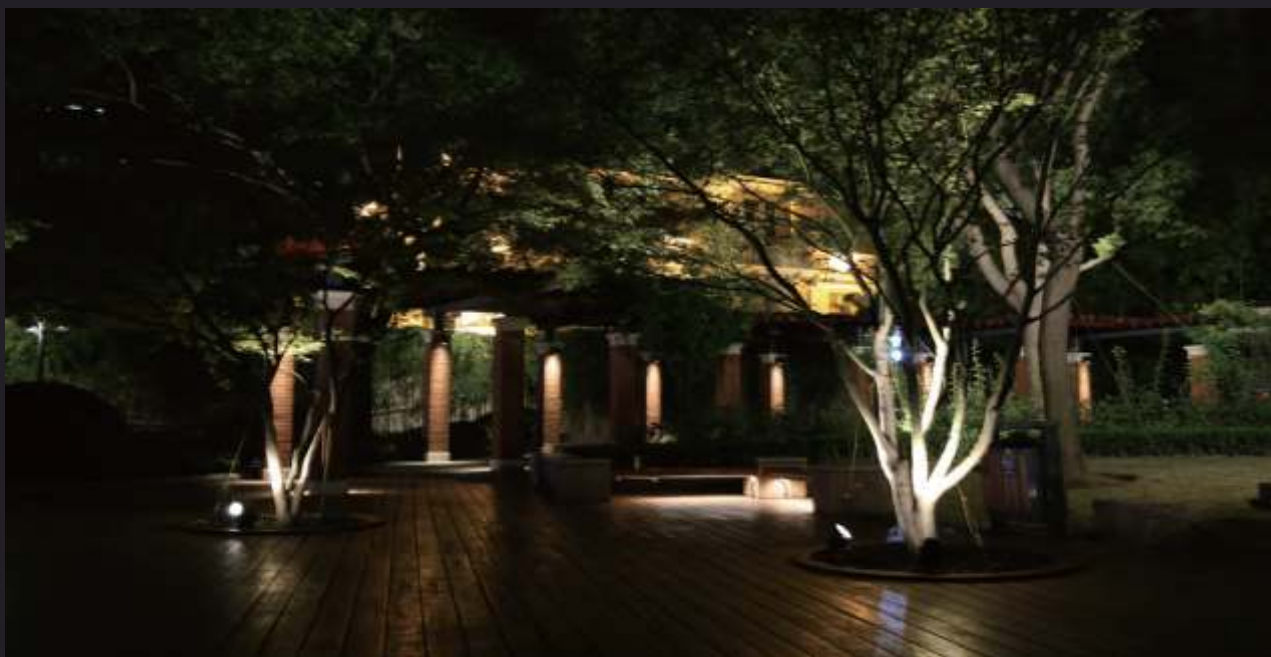

Mounting:
surface mounted on bracket

Housing:
high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Fitting's finish options:
11-black matte/ 13-grey matte
15-silver grey matte
* RAL colors available on request

LED: COB/SMD (Cree)

CRI: Ra>80

CCT:
CT30-3000K
CT40-4000K
CT50-5000K
CT60-6000K
RGB

Note: * Other CRI/CCT
available on request

LED driver:
integral/remote

Volt AC: 240V


Volt DC: 24V

Frequency: 50/60Hz

LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible

Application:
outdoors
public/private/residential
landscapes
building facades
gardens

Ambient Temp: -35°~+55°C



Ref Code
33.26.023.01.20
33.26.023.02.20

Watt
20W
20W



Volt
240V AC
240V AC

LED Qty
1 (COB)
9Pcs

LED Color
WH
WH

Beam Angle-Code:
5°-BA05
12.5°-BA12.5
20°-BA20
30°-BA30
45°-BA45
60°-BA60
15°x30°-BA15x30
10°x60°-BA10x60

COB:
10°-BA10
24°-BA24
38°-BA38



Ref Code
33.26.024.01.30
33.26.024.02.30

Watt
30W
30W



Volt
240V AC
240V AC

LED Qty
1Pcs (COB)
18Pcs

LED Color
WH
WH

Beam Angle-Code:
5°-BA05
12.5°-BA12.5
20°-BA20
30°-BA30
45°-BA45
60°-BA60
15°x30°-BA15x30
10°x60°-BA10x60

COB:
10°-BA10
24°-BA24
38°-BA38



Ref Code
33.26.025.01.60
33.26.025.02.86

Watt
60W
86W


Volt
240V AC
240V AC

LED Qty
36Pcs
36Pcs

LED Color
WH
WH

Beam Angle-Code:
5°-BA05
12.5°-BA12.5
20°-BA20
30°-BA30
45°-BA45
60°-BA60
15°x30°-BA15x30
10°x60°-BA10x60

COB:
10°-BA10
24°-BA24
38°-BA38





EXPO-2020, Dubai, UAE



Mounting:

surface mounted (ground/wall)

Housing:

high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Finish options:

13-grey matte

15-silver grey matte

* RAL colors available on request

LED:

XP-L/XP-G2/RGBW 4-in-1
(Cree)

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
available on request

LED driver:

integral/remote

Volt AC: 240V

Volt DC: 24V-36V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

PH - phase dimmable

010V - 0-10V dimmable

DALI - compatible

Application:

outdoors


public/private/residential

landscapes

building facades

gardens

Ambient Temp: -35°~+55°C



Ref Code

33.26.027.01.15

33.26.027.02.20

33.26.027.03.20

Watt

15W

20W

20W

Volt

240V AC

240V AC

24V DC

LED Qty

4Pcs

4Pcs

4Pcs

LED Color

WH

WH

RGBW

Beam Angle-Code:

Single color

2.6°-BA2.6

3.5°-BA3.5

12°-BA12

20°-BA20

30°-BA30

60°-BA60

10°x70°-BA10x70

5°x20°-BA05x20

RGBW

15°-BA15

20°-BA20

30°-BA30

15°x60°-BA15x60











5° beam angle optical lens



30° beam with anti-glare grill



10°x60° spread beam optical lens

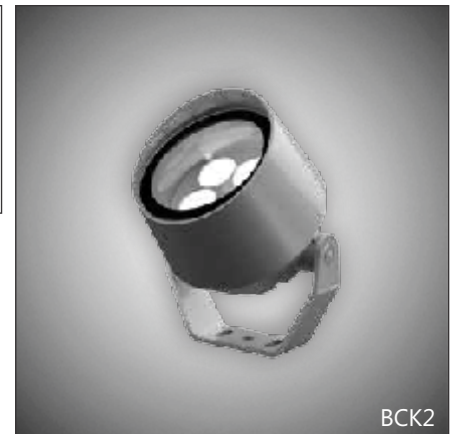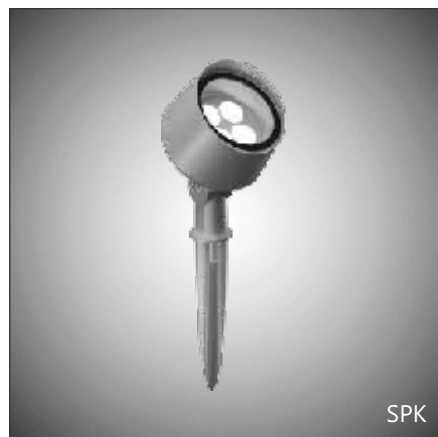

Mounting:

surface mounted (ground/wall)

Housing:

high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Finish options:

13-grey matte

15-silver grey matte

* RAL colors available on request

LED:

XP-L/XP-G2/RGBW 4-in-1

(Cree)

CRI: Ra > 85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
available on request

LED driver:

integral/remote

Volt AC: 240V

Volt DC: 24V-36V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

PH - phase dimmable

010V - 0-10V dimmable

DALI - compatible

Application:

outdoors

public/private/residential

landscapes

building facades

gardens


Ambient Temp: -35°~+55°C



N.W.: 2.7 kg



BCK1



Ref Code

33.26.028.01.22

33.26.028.02.30

33.26.028.03.30

33.26.028.04.36

33.26.028.05.36

Watt

22W

30W

30W

36W

36W

Volt

90-265V AC

90-265V AC

24V DC

24V DC

24V DC

LED Qty

6Pcs

6Pcs

6Pcs

18Pcs

18Pcs

LED Color

WH

WH

RGBW

RGB

RGBW

Beam Angle-Code:

Single color

2.6°-BA2.6

3.5°-BA3.5

12°-BA12

20°-BA20

30°-BA30

60°-BA60

10°x70°-BA10x70

5°x20°-BA05x20

RGBW

15°-BA15

20°-BA20

30°-BA30

15°x60°-BA15x60

RGB

5°-BA05




10°-BA10

12.5°-BA12.5

15°x60°-BA15x60






SPK

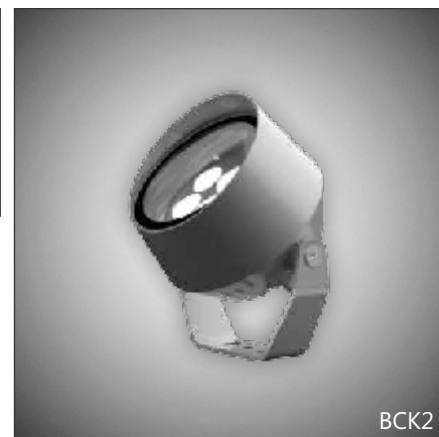

BCK2





BCK3

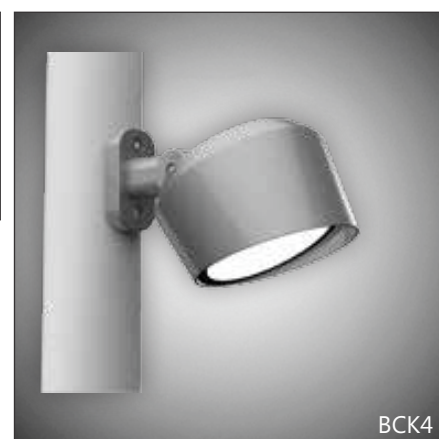

BCK4



STRAP



BCK5

flood lights

ELTE

Mounting: surface mounted/spike (ground/wall/pole)

Housing: high pressure die-cast aluminum with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT is available on request

LED driver: integral/remote

Volt AC: 240V

Volt DC: 36V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

PH - phase dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

Application:

outdoors

public/private/residential

landscapes

building facades

gardens

Ambient Temp: -35°~+55°C


Ambient Humidity: 10%~90%



N.W.: 3.7 kg



BCK1



Ref Code

33.26.029.01.35

33.26.029.02.45

33.26.029.04.60

33.26.029.05.60

33.26.029.06.60

33.26.029.07.60

Watt

35W

45W

60W

60W

60W

60W

Volt

240V AC

240V AC

36V DC

240V AC

36V DC

240V AC

LED Qty

9Pcs

9Pcs

9Pcs

9Pcs

30Pcs

30Pcs

LED Color

WH

WH

RGBW

RGBW

RGB

RGB

Lm(±)

2650

3400

4500

4500

4500

4500

Beam Angle-Code:

Single color

2.6°-BA2.6

3.5°-BA3.5

12°-BA12

20°-BA20

30°-BA30

60°-BA60

10°x70°-BA10x70

5°x20°-BA05x20

RGBW

15°-BA15

20°-BA20

30°-BA30

15°x60°-BA15x60

RGB


5°-BA05

10°-BA10

12.5°-BA12.5


15°x60°-BA15x60

DF.GLS.HYC




5° beam angle optical lens

GRL





30° beam with anti-glare grill

DF.GLS.SPR





10x60° spread beam optical lens

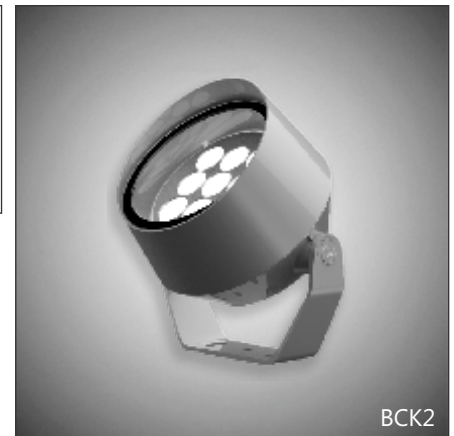

BCK2





SPK




BCK3




STRAP



BCK4

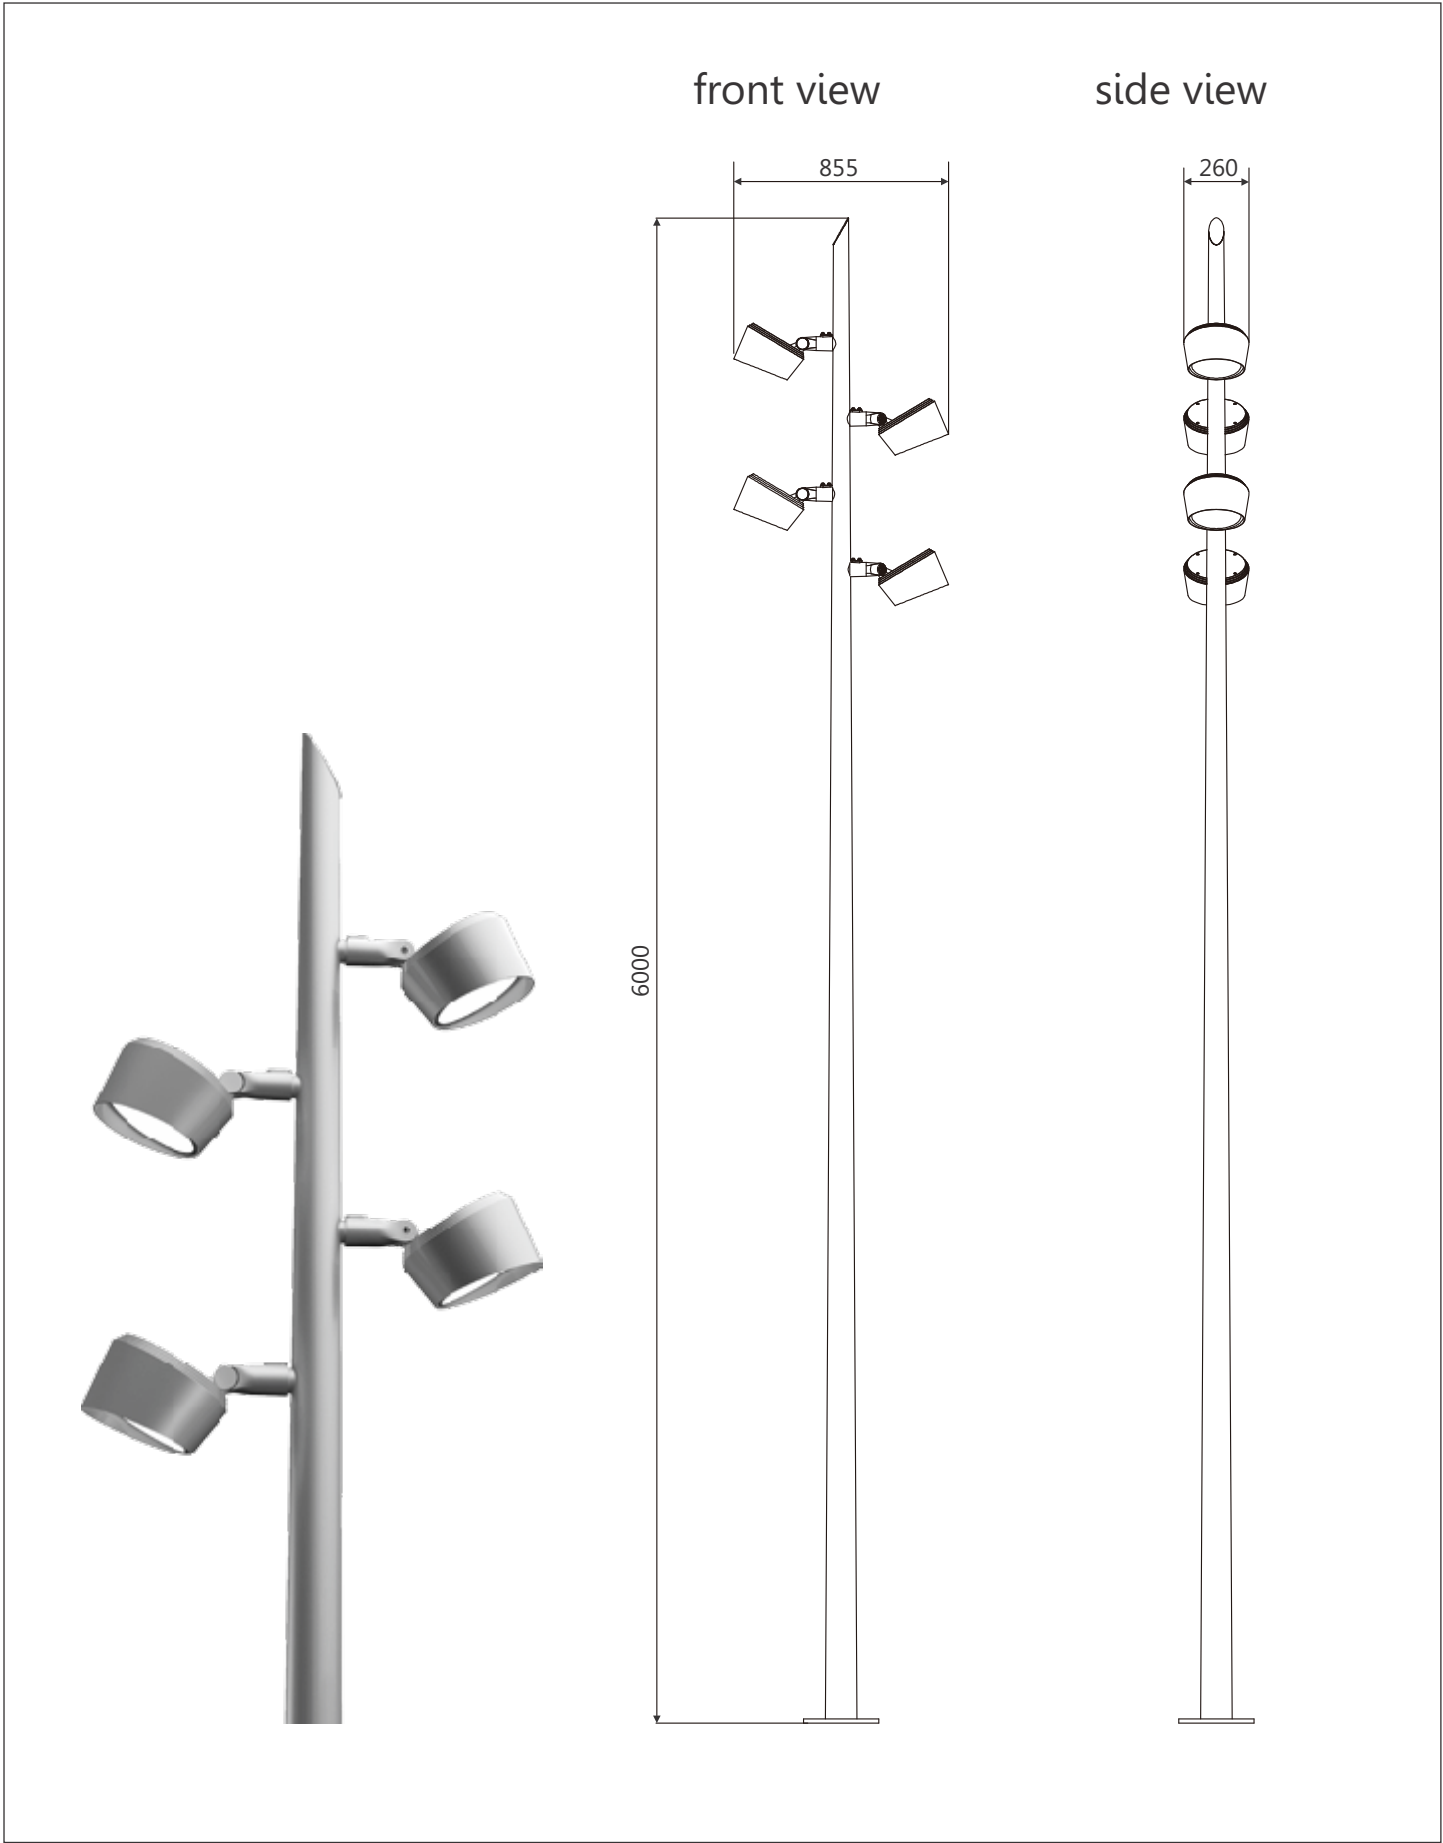


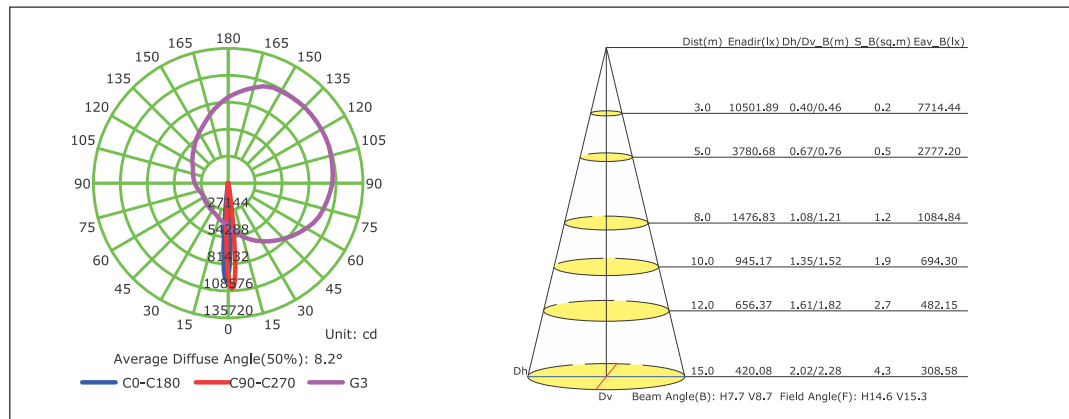

Optional accessories

* **Note:** One of them can be used. Add to the main code on necessity

- softening glass diffuser (DF.SFT)
- honeycomb optical lense (DF.GLS.HYC)
- standard anti-glare attachment (GRL)

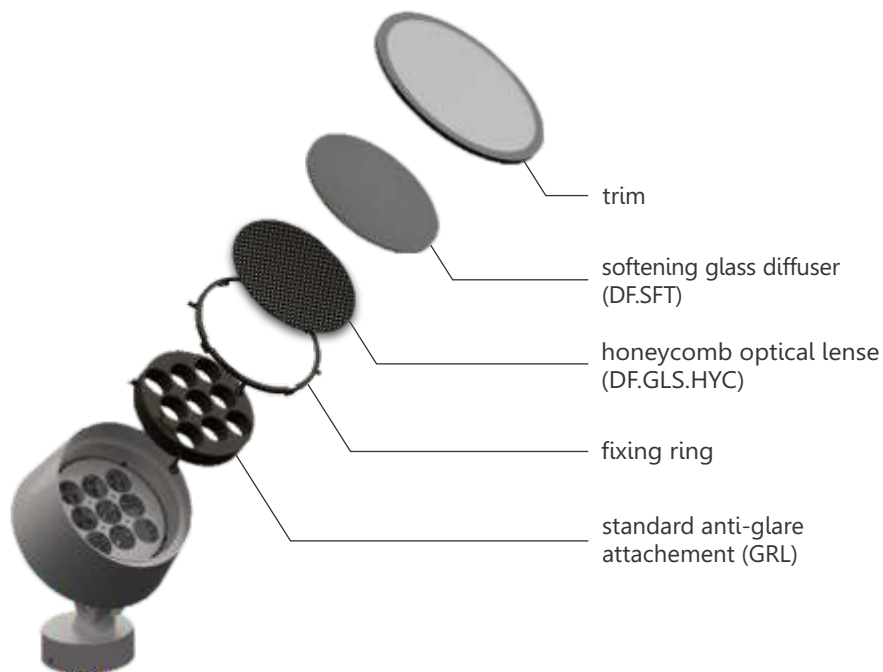



Mounting:

surface mounted (ground/wall)

Housing:

high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Finish options:

13-grey matte

15-silver grey matte

* RAL colors available on request

LED:

XP-L/XP-G2/RGBW 4-in-1
(Cree)

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
available on request

LED driver:

integral/remote

Volt AC: 240V

Volt DC: 24V-36V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

PH - phase dimmable

010V - 0-10V dimmable

DALI - compatible

Application:

outdoors

public/private/residential

landscapes

building facades

gardens


Ambient Temp: -35°~+55°C



N.W.: 5.7 kg



BCK1



Ref Code

33.26.030.01.60

33.26.030.02.75

33.26.030.03.75

33.26.030.04.100

33.26.030.05.100

Watt

60W

75W

75W

100W

100W

Volt

180-295V AC

180-295V AC

36V DC

36V DC

36V DC

LED Qty

16Pcs

16Pcs

16Pcs

48Pcs

48Pcs

LED Color

WH

WH

RGBW

RGB

RGBW

Beam Angle-Code:

Single color

2.6°-BA2.6

3.5°-BA3.5

12°-BA12

20°-BA20

30°-BA30

60°-BA60

10°x70°-BA10x70

5°x20°-BA05x20

RGBW

15°-BA15

20°-BA20

30°-BA30

15°x60°-BA15x60

RGB

5°-BA05

10°-BA10

12.5°-BA12.5

15°x60°-BA15x60

DF.GLS.HYC



5° beam angle optical lens

GRL





30° beam with anti-glare grill

DF.GLS.SPR





10x60° spread beam optical lens

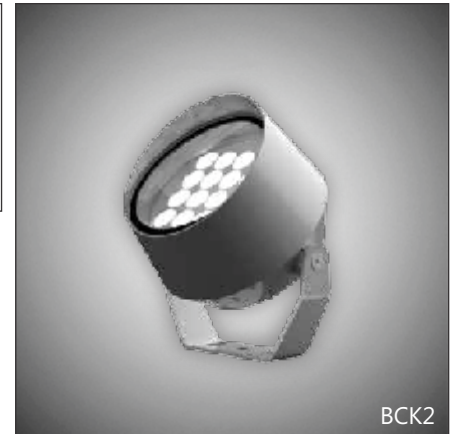

BCK2






BCK3



BCK4



STRAP

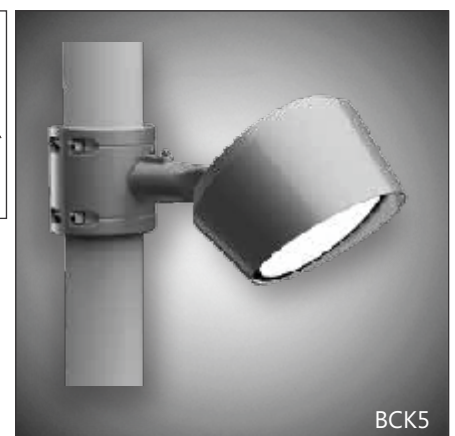

BCK5




Mounting:
surface mounted on bracket/spike
Housing:
high pressure die-cast aluminum
Diffuser: toughened glass
Fitting's finish options:
11-black matte
13-grey matte
15-silver grey matte
* RAL colors available on request

LED: Cree
CRI: Ra>80
CCT:
CT30-3000K
CT40-4000K
CT50-5000K
CT60-6000K
RGB/RGBW
Note: * Other CRI/CCT is available on request

LED driver:
integral, CC/ remote
Volt AC: 100-305V
Volt DC: 24V
Frequency: 50/60Hz
LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible

Application:
outdoors
public/private/residential
landscapes
building facades
gardens
Ambient Temp: -35°~+55°C
Ambient Humidity: 10%~90%







Ref Code
33.26.103.01.85
33.26.103.02.120
33.26.103.03.150
33.26.103.04.150
33.26.103.05.200

Watt
85W
120W
150W
150W
200W

LED Qty
25Pcs
25Pcs
72Pcs
72Pcs
24Pcs

LED Color
WH
WH
RGB
RGBW
RGBW

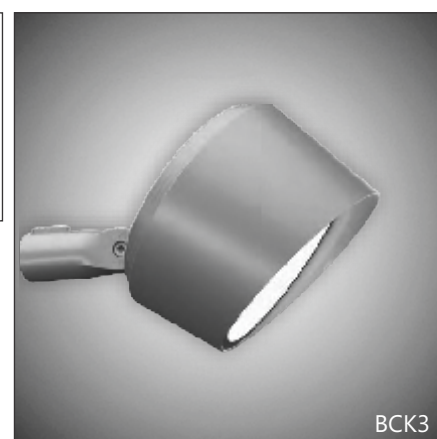

Beam Angle-Code:

85W/120W

2.6°-BA2.6
3.5°-BA3.5
12°-BA12
20°-BA20
30°-BA30
60°-BA60
10°x70°-BA10x70
5°x20°-BA05x20

120W

20°-BA20
30°-BA30

15°x60°-BA15x60

150W

5°-BA05


8°-BA08

12.5°-BA12.5

30°-BA30

10°x60°-BA10x60

DF.GLS.HYC



5° beam angle optical lens

GRL




30° beam with anti-glare grill

DF.GLS.SPR




10x60° spread beam optical lens

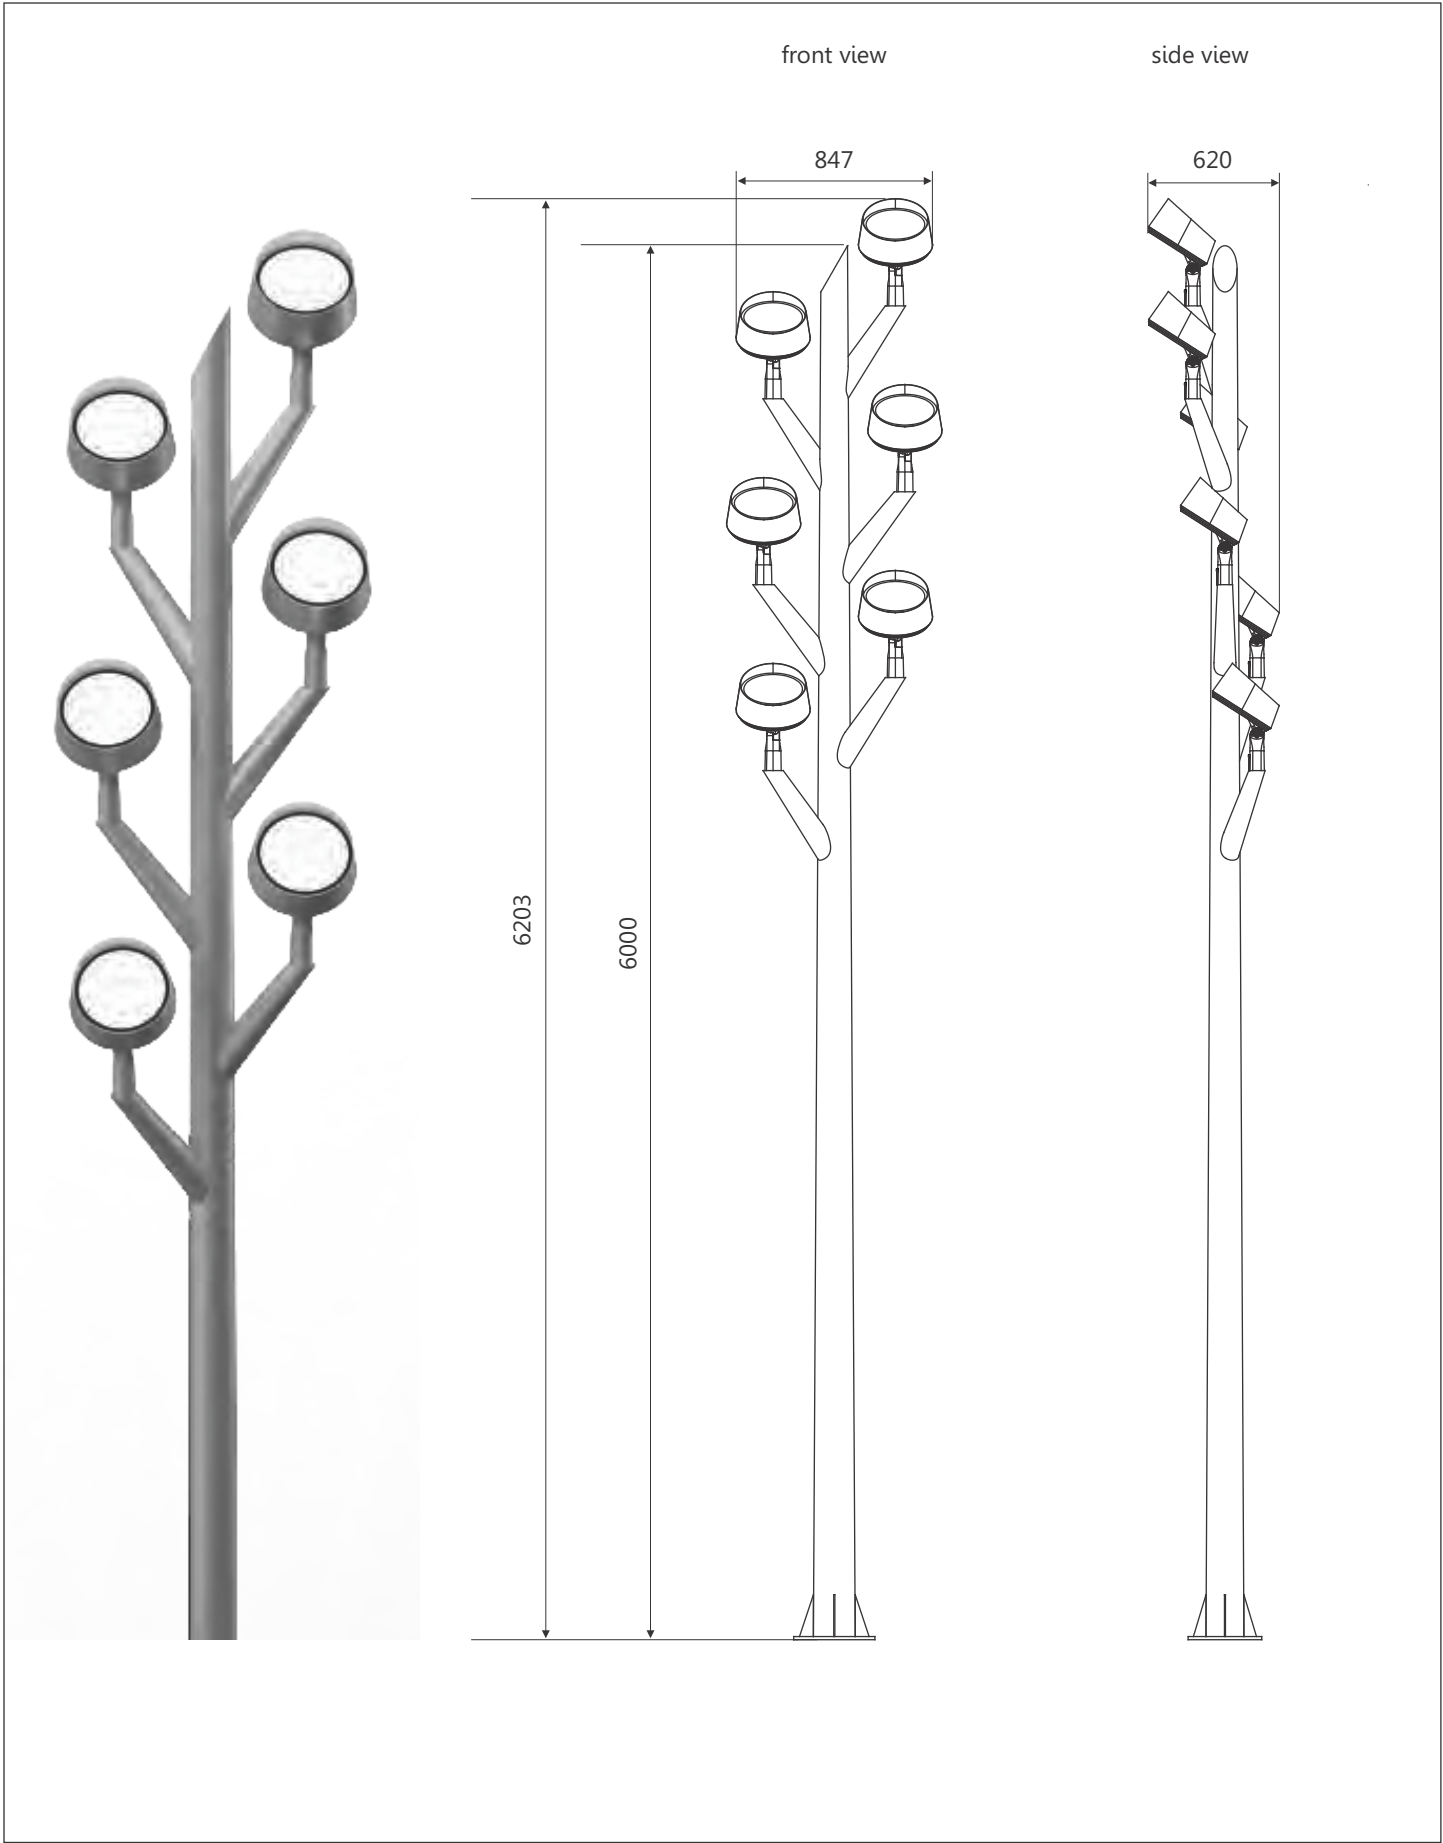



front view

side view

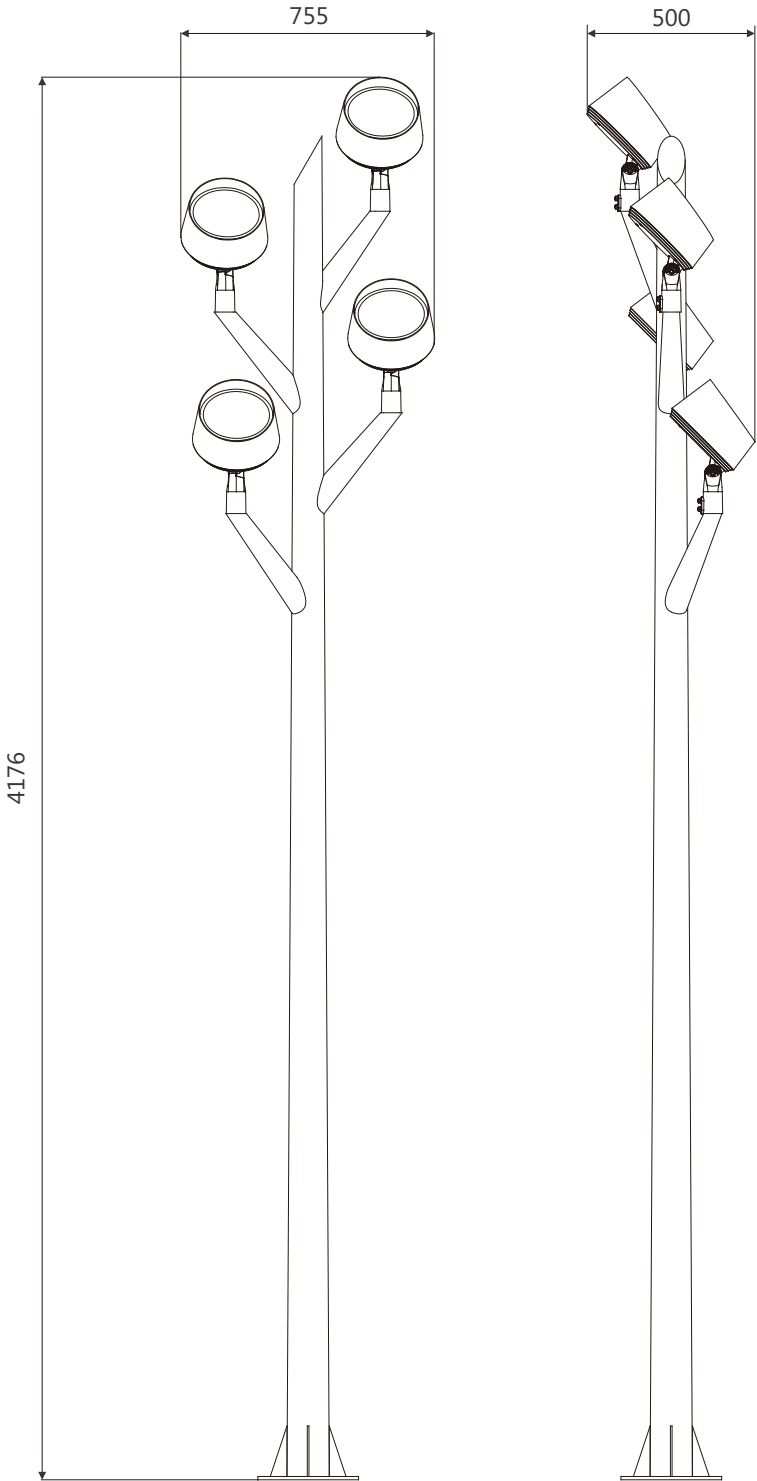





Mounting: surface mounted on bracket
Housing: die-cast powder coated aluminum
Diffuser: 4 mm tempered glass
Gasket: tooling shaped seal
Bracket: aluminum
Fitting's finish options:
 11-black matte/ 13-grey matte
 15-silver grey matte
 * RAL colors available on request


LED: Cree
CRI: Ra>80
CCT:
 CT30-3000K
 CT40-4000K
 CT50-5000K
 CT60-6000K
 RGB
Note:* Other CRI/CCT
 available on request

LED driver:
 integral/remote
Volt AC: 220-240V
Volt DC: 12V/24V
Frequency: 50/60Hz
Power Cable:
 (DC12V) 2X1.0mm²/L=2.0m
 (AC 240V) 3X1.0mm²/L=2.0m
 (RGB) 4X0.75mm²/L=2.0m



Application:
 outdoors
 public/private/residential
 landscapes
 building facades
 gardens
Ambient Temp: -40°~+55°C




Ref Code	Watt	Volt	mA	Lm(±)
33.27.044.01.20	20W	24V DC	960	1700
33.27.044.02.20	20W	240V AC	105	



Beam Angle: 100°





Ref Code	Watt	Volt	mA	Lm(±)
33.27.045.01.20	4x5W	24V DC	1279	1800
33.27.045.02.20	4x5W	240V AC	114	




Beam Angle-Code:

18°-BA18
 25°-BA25
 40°-BA40





Ref Code	Watt	Volt	mA	Lm(±)
33.27.046.01.24	6x4W (RGBW 4-in-1)	24V DC	299/350/352/349	1000




Beam Angle-Code:

15°-BA15
 22°-BA22



Ref Code	Watt	Volt	mA	Lm(±)
33.27.047.01.24	12x2W	24V DC	1051	1400
33.27.047.02.24	12x2W	240V AC	79	
33.27.047.03.24	12x2W(RGB 3 in 1)	24V DC	429/512/506	



Beam Angle-Code:
symmetric

9°-BA09
 15°-BA15
 20°-BA20
 30°-BA30
 45°-BA45
RGB
 30°-BA30




Mounting:
surface mounted on bracket/spike
Housing:
die-cast powder coated aluminum
Diffuser: tempered glass
Reflector: polycarbonate
Note: * 355° horizontally rotation,
vertically adjustable
Finish options:
* RAL colors available on request

LED: Cree
CRI: Ra>80
CCT:
CT30-3000K
CT40-4000K
CT50-5000K
Note: * Other CRI/CCT
available on request



LED driver options:
integral
Volt AC: 220-240V
Frequency: 50-60Hz
LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible

Application:
outdoors
public/private/residential
landscapes
building facades
gardens
Ambient Temp: -40°~+55°C




Ref Code	Watt	Lm(±)	DiaxHxWxL
33.45.092.01.15	15W	1460	150x230x85x100
33.45.093.01.35	35W	3660	180x262x100x100
33.45.094.01.84	84W	9700	250x354x140x140

Beam Angle-Code:
10°-BA10
23°-BA23
36°-BA36

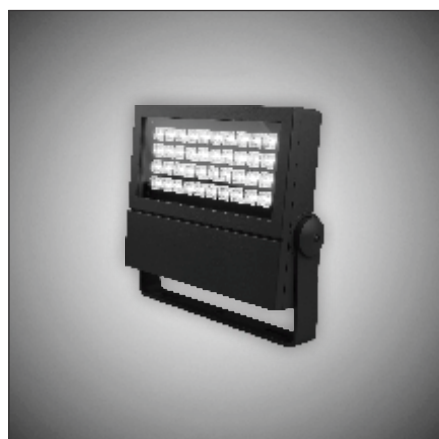

Ref Code	Watt	Lm(±)
33.45.095.01.48	48W	4580
33.45.095.02.72	72W	6490
33.45.095.03.100	100W	8870

Beam Angle-Code:
10°-BA10
25°-BA25
50°-BA50
90°-BA90
35°x155°-BA25x55
45°x155°-BA45x155

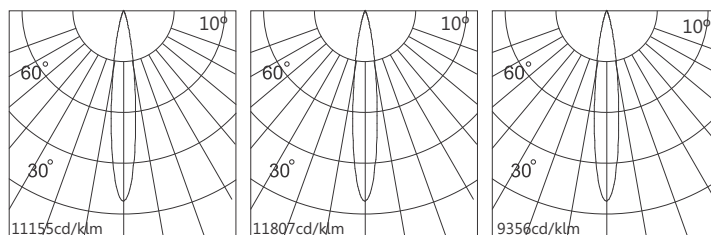

Mounting:

surface mounted on bracket

Housing:

high pressure die-cast aluminum

Diffuser: tempered clear glass

Fitting's finish options:

- 11-black matte
- 13-grey matte
- 15-silver grey matte
- * RAL colors available on request
- MG-marine grade

LED: Cree

CRI: Ra>80

CCT:

CT30-3000K
CT40-4000K
CT50-5000K
CT60-6000K
RGB

Note: * Other CRI/CCT available on request

LED driver:

integral/remote

Volt AC: 240V

Volt DC: 24V



Frequency: 50/60Hz

LED driver options:

ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible

Application:

outdoors
public/private/residential
landscapes
building facades
gardens
Ambient Temp: -35°~+55°C



Ref Code

33.26.057.01.22
33.26.057.02.30
33.26.057.03.30
33.26.057.04.36
33.26.057.05.22
33.26.057.06.30
33.26.057.07.16

Watt

22W
30W
30W
36W
22W
30W
16W

LED Qty

12Pcs
28Pcs
18Pcs
20Pcs
12Pcs
18Pcs
Custom

LED Color

WH
WH
WH
WH
RGB
RGB
WH

Lm(±)

1870
2550
2550
3060
-
-
1360

Beam Angle-Code:

symmetric (SYM)

12.5°-BA12.5
20°-BA20
30°-BA30
45°-BA45
15°x30°-BA15x30

asymmetric (ASM)

120°x70°-BA120x70°




anti-glare cap (CAP)



Ordering Guide:

33.26.057.01.22+SYM+MG+11+BA20+CT30+ND+BCK1

(item+beam direction+marine grade+color+beam angle+LED CCT+driver+mounting type)



Ref Code

33.26.058.01.60
33.26.058.02.60

Watt

60W
60W

LED Qty

1Pcs(COB)
36Pcs

LED Color

WH
WH

Lm(±)

5100
5100

Beam Angle-Code:

12.5°-BA12.5
20°-BA20
30°-BA30
45°-BA45
15°x30°-BA15x30

COB:

12°-BA12
24°-BA24
48°-BA48





Notes:

- * RGB-DC 24V-DMX512
- * Single Color - AC 100/240V
- * Lm output mentioned is based on delivered Lm output data

Ordering Guide:

33.26.058.01.60+11+BA20+CT30+ND+BCK1

(item+color+beam angle+LED CCT+driver+mounting type)



Mounting:
surface mounted on bracket
Housing:
high pressure die-cast aluminum
Diffuser: tempered clear glass
Fitting's finish options:
11-black matte
13-grey matte
15-silver grey matte
* RAL colors available on request
MG-marine grade


LED: Cree
CRI: Ra>80
CCT:
CT30-3000K
CT40-4000K
CT50-5000K
CT60-6000K
RGB
Note: * Other CRI/CCT
available on request

LED driver:
integral/remote
Volt AC: 240V
Volt DC: 24V
Frequency: 50/60Hz
LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible


Application:
outdoors
public/private/residential
landscapes
building facades
gardens
Ambient Temp: -35°~+55°C



N.W.: 4.5 kg



Ref Code	Watt	LED Qty	LED Color
33.26.059.01.60	60W	30Pcs	WH
33.26.059.03.60	60W	30Pcs	WH
33.26.059.02.102	102W	48Pcs	RGB
33.26.059.04.102	102W	48Pcs	RGB





Beam Angle Code:
6°-BA6
12°-BA12
30°-BA30
48°-BA48
12°x48°-BA12x48

Notes:


- * RGB-DC 24V-DMX512
- * Single Color - AC 100/240V
- * lm output mentioned is based on delivered lm output data

Ordering Guide:

33.26.059.01.60+SYM+MG+11+BA12+CT30+ND+BCK1
(item+beam direction+marine grade+color+beam angle+LED CCT+driver+mounting type)




N.W.: 10.0 kg



Ref Code	Watt	LED Qty	LED Color
33.26.060.01.150	150W	70Pcs	WH
33.26.060.03.185	185W	90Pcs	WH
33.26.060.04.225	225W	120Pcs	WH
33.26.060.05.185	185W	90Pcs	RGB
33.26.060.06.225	225W	120Pcs	RGB

Beam Angle-Code:

- 5°-BA05
- 12.5°-BA12.5
- 20°-BA20
- 30°-BA30
- 60°-BA60
- 15x30°-BA15x30
- 10°x60°-BA10x60
- 120°x60°-BA120x60°



Notes:

- * RGB-DC 24V-DMX512
- * Single Color - AC 100/240V
- * lm output mentioned is based on delivered lm output data

Ordering Guide:

33.26.060.01.150+11+BA20+CT30+ND
(item+color+beam angle+LED CCT+driver)



Mounting: surface mounted/spike
(ground/wall/pole)

Housing:
high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree/Lumileds

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
is available on request

LED driver:

- integral (CC)

Volt AC: 100-305V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

RDM

Application:

outdoors

public/private/residential



landscapes

building facades

gardens

Ambient Temp: -35°~+55°C

Ambient Humidity: 10%~90%



Ref Code

33.26.100.01.90

33.26.100.02.90

33.26.100.03.90

33.26.100.04.150

33.26.100.05.150

Watt

90W

90W

90W

150W

150W

Volt

240V AC

240V AC

240V AC

240V AC

240V AC

LED Qty

36Pcs

36Pcs

36Pcs

36Pcs

36Pcs

LED Color

WH

RGBW

RGBA

WH

RGBW

Beam Angle-Code:

2.6°-BA2.6

30°-BA30

3.5°-BA3.5

60°-BA60

12°-BA12

10°x70°-BA10x70


20°-BA20

5°x20°-BA05x20




DF.GLS.HYC





5° beam angle optical lens
30° beam angle optical lens
10x60° spread beam optical lens



Bracket



CAP



Ref Code

33.26.101.01.210

33.26.101.02.210

33.26.101.03.210

33.26.101.04.300

33.26.101.05.360

Watt

210W

210W

210W

300W

360W

Volt

240V AC

240V AC

240V AC

240V AC

240V AC

LED Qty

90Pcs

90Pcs

90Pcs

90Pcs

40Pcs

LED Color

WH

RGBW

RGBA

WH

RGBW

Beam Angle-Code:

2.6°-BA2.6

30°-BA30

3.5°-BA3.5

60°-BA60

12°-BA12

10°x70°-BA10x70


20°-BA20

5°x20°-BA05x20




DF.GLS.HYC




5° beam angle optical lens
30° beam angle optical lens
10x60° spread beam optical lens



Bracket

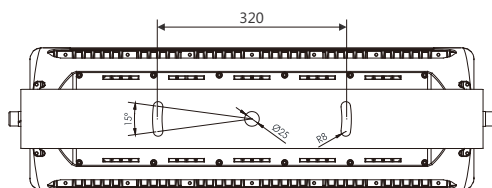

CAP



Mounting: surface mounted/spike
(ground/wall/pole)

Housing:

high pressure die-cast aluminum
with electrostatic plastic coating

Diffuser: clear tempered glass

Color/Finish options:

MG-marine grade

13-grey matte

15-silver grey matte

* RAL colors available on request

LED: Cree/Lumileds

CRI: Ra>85

CCT:

CT40-4000K

CT50-5000K

CT60-6000K

RGB/RGBW

Note: * Other CRI/CCT
is available on request

LED driver:

- integral (CC)

Volt AC: 100-305V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

010V - 0-10V dimmable

DALI - compatible

DMX - DMX512

RDM

Application:

outdoors

public/private/residential



landscapes

building facades

gardens

Ambient Temp: -35°~+55°C

Ambient Humidity: 10%~90%



Ref Code

33.26.102.01.420

33.26.102.02.420

33.26.102.03.420

33.26.102.04.600

33.26.102.05.720

Watt

420W

420W

420W

600W

720W

Volt

240V AC

240V AC

240V AC

240V AC

240V AC

LED Qty

180Pcs

180Pcs

180Pcs

180Pcs

80Pcs

LED Color

WH


RGBW

RGBA


WH

RGBW




DF.GLS.HYC



5° beam angle optical lens
30° beam angle optical lens
10x60° spread beam optical lens



Bracket

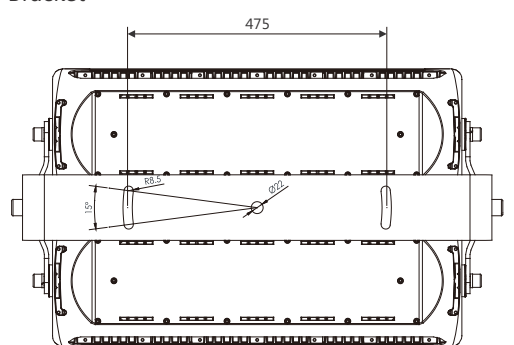

CAP



Beam Angle-Code:

2.6°-BA2.6

3.5°-BA3.5

12°-BA12

20°-BA20

30°-BA30

60°-BA60

10°x70°-BA10x70

5°x20°-BA05x20

