




Mounting: recessed into ceiling
Housing: cold rolled sheet,
aluminum alloy
Duffuser: polycarbonate
Finish options:
01-white matte
11-black matte

LED: COB (Citizen)
CRI: Ra>70/80/90
CCT:
CT27-2700k
CT30-3000k
CT40-4000k
CT50-5000k
CT60-6000k

LED driver: remote
Volt AC: 220-240V
LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible
Note: *Lm given in data is
based on 3000k


Areas of use:
indoors:
public/ private/ residential

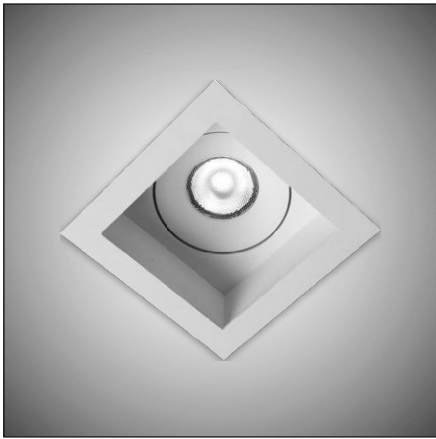

Ref Code	Watt	mA	Lm(±)	IP
03.05.059.01.07	7W	350	550	54
03.05.059.02.07	7W	350	550	65

Beam Angle-Code:

12°-BA12
36°-BA36
60°-BA60



Ref Code	Watt	mA	Lm(±)	IP
03.05.065.01.07	7W	700	670	20

Beam Angle-Code:

12°-BA12
24°-BA24
36°-BA36